

V-Pulleys




SIT V-Pulleys

On the market there are various types of **V-belts**, among which, the most 'widespread are:

- "narrow" SPZ-SPA-SPB-SPC (ISO4184 - DIN 7753)
- "classic" Z-A-B-C (ISO 4184 - DIN 2215)
- "American narrow" 3V-5V (RMA-MPTA).

The "**narrow**" **V-pulleys** (DIN2211 - ISO4183) **manufactured by SIT** and shown in this catalogue are suitable to be used with all the aforementioned types of belts. Note: for banded belts 3V - 5V - 8V use pulleys with RMA specifications (ref. pag 101). These pulleys are not standard and are available only on request.

Compatibility table between main V-belts types and SIT V-pulleys.

		V-belts										
		ISO 4184 - DIN 7753/1				RMA - MPTA			ISO 4184 - DIN 2215			
		SPZ	SPA	SPB	SPC	3V	5V	8V	Z	A	B	C
a x b	9,7 x 8	12,7 x 10	17 x 13	22 x 18	9,5 x 8	16 x 13,5	25,5 x 23	10 x 6	13 x 8	17 x 11	22 x 14	
SIT Pulleys (DIN 2211)												
PT	SPZ	○										
	SPA	-	.	-	-	-	-	-	-	○	-	-
	SPB	-	-	○	-	-	○*	-	-	-	○	-
	C	-	-	-	X	-	-	-	-	-	-	○
PBT	SPZ	○	-	-	-	○*	-	-	○	-	-	-
	SPA	-	○	-	-	-	-	-	-	○	-	-
	SPB	-	-	○	-	-	○*	-	-	-	○	-
	SPC	-	-	-	○	-	-	-	-	-	-	○
PCT	SPZ	○	-	-	-	○*	-	-	○	-	-	-
	SPA	-	○	-	-	-	-	-	-	○	-	-
	SPB	-	-	○	-	-	○*	-	-	-	○	-
	SPC	-	-	-	○	-	-	-	-	-	-	○

○ = COMPATIBLE
X = NOT COMPATIBLE

* Pitch among the grooves of SPZ pulley is different from the 3V. Similarly, the pitch is also different between SPB and 5V.

PT pulleys - solid hub

Material: cast iron DIN 1691 GG-20/GG25
Finishing: protective surface treatment.

V-groove pulleys suitable for normal application for use with the following belt types:

- SPZ-Z-3V
- SPA-A
- SPB-B-5V
- C



PBT pulleys - for mounting taper bushing SER-SIT®

Material: cast iron DIN 1691 GG-20/GG25
Finishing: protective surface treatment.

V-groove pulleys suitable for use with the following belts:

- SPZ-Z-3V
- SPA-A
- SPB-B-5V
- SPC-C



PCT pulleys - oversized hub for Self Locking Units

Material: cast iron DIN 1691 GG-20/GG25
Finishing: protective surface treatment.

V-groove pulleys suitable for use with the following belts:

- SPZ-Z-3V
- SPA-A
- SPB-B-5V
- SPC-C



Features

Our pulleys can be used for application with a speed up to 35 m/s. The pulley dimensions are very accurate as they are manufactured only by means of CNC or automatic lathes. For higher speed is strongly recommended to use steel as material of construction.

Balancing

Our PBT pulleys are statically balanced according to ISO. The PT pulleys are not balanced, as they do not have a finished bores.

TOLERANCES


dw [mm]	Tolerance of pitch diameter dw [mm]	Eccentricity tolerance relevant to the outside diameter [mm]
50	± 0,4	0,2
56	± 0,4	
63	± 0,5	
71	± 0,6	
80	± 0,6	
90	± 0,7	
100	± 0,8	0,3
112	± 0,9	
118	± 1,0	
125	± 1,0	
135	± 1,0	
140	± 1,1	
150	± 1,2	0,4
160	± 1,3	
180	± 1,4	
190	± 1,5	
200	± 1,6	
212	± 1,7	
224	± 1,8	0,5
236	± 1,9	
250	± 2,0	
280	± 2,2	
300	± 2,4	
315	± 2,5	
355	± 2,8	0,6
400	± 3,2	
450	± 3,6	
500	± 4,0	
560	± 4,5	
630	± 5,0	
710	± 5,7	0,8
800	± 6,4	
900	± 7,2	
1000	± 8,0	
1120	± 9,0	
1250	± 10,0	

Max. difference among the pitch diameter of the grooves of the same pulley [mm]	
SPZ - SPA - SPB	SPC
0,4	0,6

Note


Due to a constant improvement of our products, technical data of the pulleys may be subject to changes. For technical and production reasons, in some cases materials other than those indicated in the catalogue may be used. For confirmation of the material actually available, please contact customer service.

Dimension of grooves (DIN 2211)

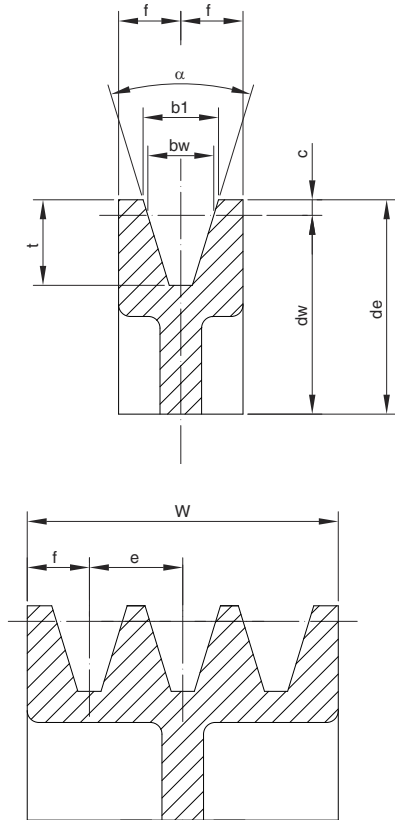

Section	SPZ [mm]	SPA [mm]	SPB [mm]	C/SPC [mm]	
b _w [mm]	8,5	11,0	14,0	19,0	
b ₁ [mm] (±0,2)	9,7	12,7	16,3	22,0	
c [mm]	2,0	2,8	3,5	4,8	
e [mm]	12 ± 0,3	15 ± 0,3	19 ± 0,4	25,5 ± 0,5	
f [mm]	8 ± 0,6	10 ± 0,6	12,5 ± 0,8	17 ± 1	
t [mm] min.	11 ^{+0,6} ₀	13,8 ^{+0,6} ₀	17,5 ^{+0,6} ₀	C: 20 SPC: 23,8 ^{+0,6} ₀	
α 34° per dw [mm]	≤ 80	≤ 118	≤ 190	≤ 315	
α 38° per dw [mm]	> 80	> 118	> 190	> 315	
Tolerance	± 1°	± 1°	± 1°	± 1°	
W Crown width for number of grooves Z [mm]	Z = 1	16	20	25	34
	2	28	35	44	59,5
	3	40	50	63	85
	4	52	65	82	110
	5	64	80	101	136
	6	76	95	120	161,5
	7	88	110	139	187
	8	100	125	158	212,5
	9	112	140	177	238
	10	124	155	196	263,5
	11	136	170	215	289
	12	148	185	234	314,5

Dimension of grooves of V-Pulleys suitable for banded belts (RMA)

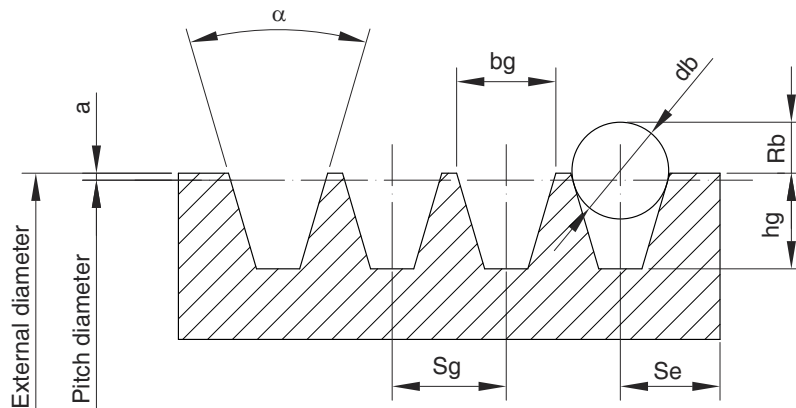

Section	D [mm]	α [°]	bg [mm]	hg min. [mm]	a [mm]	Rb min. [mm]	db [mm]	Sg [mm]	Se [mm]
3V	≤ 89	36 ± 0,25	8,89 ± 0,13	8,63	0,63	4,6	8,73 ± 0,01	10,3 ± 0,4	9 ⁻² ₋₁
	90 ÷ 152	38 ± 0,25	8,89 ± 0,13	8,63	0,63	4,6	8,73 ± 0,01	10,3 ± 0,4	9 ⁻² ₋₁
	153 ÷ 1305	40 ± 0,25	8,89 ± 0,13	8,63	0,63	4,7	8,73 ± 0,01	10,3 ± 0,4	9 ⁻² ₋₁
	> 305	42 ± 0,25	8,89 ± 0,13	8,63	0,63	4,8	8,73 ± 0,01	10,3 ± 0,4	9 ⁻² ₋₁
5V	≤ 254	38 ± 0,25	15,24 ± 0,13	14,98	1,27	8,4	15,08 ± 0,01	17,5 ± 0,4	13 ⁻³ ₋₁
	255 ÷ 406	40 ± 0,25	15,24 ± 0,13	14,98	1,27	8,4	15,08 ± 0,01	17,5 ± 0,4	13 ⁻³ ₋₁
	> 406	42 ± 0,25	15,24 ± 0,13	14,98	1,27	8,5	15,08 ± 0,01	17,5 ± 0,4	13 ⁻³ ₋₁
8V	≤ 406	38 ± 0,25	25,4 ± 0,13	25,14	2,54	14,6	25,4 ± 0,01	28,6 ± 0,4	19 ⁻⁶ ₋₂
	407 ÷ 569	40 ± 0,25	25,4 ± 0,13	25,14	2,54	14,7	25,4 ± 0,01	28,6 ± 0,4	19 ⁻⁶ ₋₂
	> 569	42 ± 0,25	25,4 ± 0,13	25,14	2,54	14,9	25,4 ± 0,01	28,6 ± 0,4	19 ⁻⁶ ₋₂

Dimensions of V-Pulleys PT - solid hub





PT SPZ-Z-3V

Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
50	1	1	32*	28	16	12
	2	1	35*	35	28	7
	3	1	35*	44	40	4
	4	1	35*	56	52	4
56	1	1A	32**	28	16	12
	2	1	40**	35	28	7
	3	1	42**	44	40	4
	4	1	42**	56	52	4
63	1	1	40	28	16	12
	2	1	40	35	28	7
	3	1	42	44	40	4
	4	1	42	56	52	4
71	1	1A	40	28	16	12
	2	1	48	35	28	7
	3	1	50	44	40	4
	4	1	50	56	52	4
75	1	1A	40	28	16	12
	2	1A	50	35	28	7
	3	1A	50	44	40	4
	4	1A	50	56	52	4
80	1	4	40	28	16	12
	2	1A	50	35	28	7
	3	1A	50	44	40	4
	4	1	65	56	52	4
	5	1	65	68	64	4
85	1	4	40	28	16	12
	2	1A	50	35	28	7
	3	1A	50	44	40	4
	4	1	65	56	52	4
	5	1	65	68	64	4
90	1	4	40	28	16	12
	2	4	50	35	28	7
	3	4	50	44	40	4
	4	1A	65	56	52	4
	5	1	68	68	64	4
95	1	4	45	28	16	12
	2	4	50	35	28	7
	3	4	50	40	40	-
	4	1A	65	56	52	4
	5	1A	68	68	64	4
100	1	4	45	28	16	12
	2	4	50	35	28	7
	3	4	60	40	40	-
	4	1A	65	56	52	4
	5	1A	68	68	64	4
106	1	4	45	28	16	12
	2	4	50	35	28	7
	3	4	60	40	40	-
	4	4	65	56	52	4
	5	4	68	68	64	4
112	1	4	45	28	16	12
	2	4	50	35	28	7
	3	4	60	40	40	-
	4	4	68	52	52	-
	5	5	68	60	64	4
118	1	4	45	28	16	12
	2	4	50	35	28	7
	3	4	60	40	40	-
	4	4	68	52	52	-
	5	5	75	60	64	4

» PT SPZ-Z-3V

Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
125	1	4	45	28	16	12
	2	4	50	35	28	7
	3	4	60	40	40	-
	4	4	68	52	52	-
	5	5	75	60	64	4
132	1	4	45	28	16	12
	2	4	60	40	28	12
	3	4	60	40	40	-
	4	4	68	52	52	-
	5	5	75	60	64	4
140	1	4	55	28	16	12
	2	4	60	40	28	12
	3	4	60	40	40	-
	4	4	68	52	52	-
	5	5	75	60	64	4
150	1	4	55	32	16	16
	2	4	60	40	28	12
	3	4	68	45	40	5
	4	4	68	52	52	-
	5	5	80	60	64	4
160	1	4	55	32	16	16
	2	4	60	40	28	12
	3	4	68	45	40	5
	4	4	68	52	52	-
	5	5	80	60	64	4
180	1	4	55	32	16	16
	2	4	65	40	28	12
	3	4	68	45	40	5
	4	4	80	52	52	-
	5	5	80	60	64	4
200	1	4A	55	32	16	16
	2	4A	65	40	28	12
	3	4A	68	45	40	5
	4	4A	80	52	52	-
	5	5A	80	60	64	4
224	1	8	55	32	16	16
	2	8	65	40	28	12
	3	8	68	45	40	5
	4	8	80	52	52	-
	5	9	80	60	64	4
250	1	8	55	32	16	16
	2	8B	62	40	28	12
	3	8	68	45	40	5
	4	8	80	52	52	-
	5	9	88	60	64	4
280	1	8	68	45	16	29
	2	8	68	45	28	17
	3	8	80	50	40	10
	4	8	80	52	52	-
	5	9	96	60	64	4
315	1	8	68	45	16	29
	2	8	68	45	28	17
	3	8	80	50	40	10
	4	8	96	55	52	3
	5	9	96	60	64	4
355	1	8	68	45	16	29
	2	8	68	45	28	17
	3	8	80	50	40	10
	4	8	96	55	52	3
	5	9	96	60	64	4

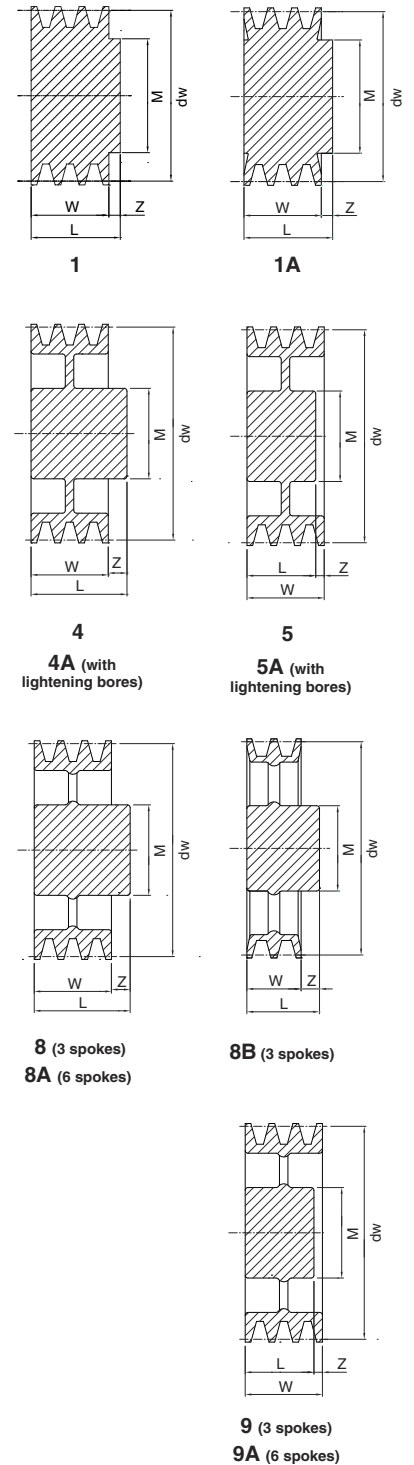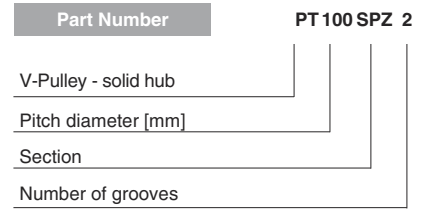

* Note: the diameter at the bottom of the groove is 32 mm
 ** Note: the diameter at the bottom of the groove is 38 mm

Dimensions of V-Pulleys PT - solid hub




PT SPA-A

Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
50	1	1	32*	35	20	15
	2	1	40*	45	35	10
	3	1	40*	54	50	4
56	1	1	35**	35	20	15
	2	1	40**	45	35	10
	3	1	40**	54	50	4
63	1	1A	40	35	20	15
	2	1A	40	45	35	10
	3	1A	40	54	50	4
	4	1A	40	68	65	3
	5	1A	40	84	80	4
71	1	1A	40	35	20	15
	2	1	50	45	35	10
	3	1	52	54	50	4
	4	1	52	68	65	3
	5	1	52	84	80	4
75	1	1A	40	35	20	15
	2	1A	50	45	35	10
	3	1A	52	54	50	4
	4	1A	52	68	65	3
	5	1A	52	84	80	4
80	1	1A	45	35	20	15
	2	1A	50	45	35	10
	3	1	62	54	50	4
	4	1	62	68	65	3
	5	1	62	84	80	4
85	1	4	45	35	20	15
	2	1A	50	45	35	10
	3	1A	62	54	50	4
	4	1A	62	68	65	3
	5	1A	62	84	80	4
90	1	4	45	35	20	15
	2	1A	60	45	35	10
	3	1A	62	54	50	4
	4	1A	68	68	65	3
	5	1A	68	84	80	4
95	1	4	45	35	20	15
	2	1A	60	45	35	10
	3	1A	62	54	50	4
	4	1A	68	68	65	3
	5	1A	68	84	80	4
100	1	4	45	35	20	15
	2	1A	60	45	35	10
	3	1A	62	54	50	4
	4	2A	70	50	65	15
	5	2A	70	50	80	30
106	1	4	45	35	20	15
	2	4	60	45	35	10
	3	4	60	50	50	-
	4	2A	68	50	65	15
	5	2A	68	50	80	30
112	1	4	45	35	20	15
	2	4	60	45	35	10
	3	4	60	50	50	-
	4	2A	68	50	65	15
	5	2A	68	50	80	30
118	1	1	60	35	20	15
	2	4	60	45	35	10
	3	1A	70	50	50	-
	4	2A	70	50	65	15
	5	2A	80	50	80	30

» PT SPA-A

Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
125	1	4	55	35	20	15
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	68	50	65	15
	5	5	80	50	80	30
132	1	4	55	35	20	15
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	68	50	65	15
	5	5	80	50	80	30
140	1	4	60	35	20	15
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	68	50	65	15
	5	5	80	50	80	30
150	1	4	60	40	20	20
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	68	50	65	15
	5	5	80	50	80	30
160	1	4	60	40	20	20
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	80	50	65	15
	5	5	80	50	80	30
170	1	4	60	40	20	20
	2	4	60	45	35	10
	3	4	68	50	50	-
	4	5	80	50	65	15
	5	5	80	50	80	30
180	1	4	65	40	20	20
	2	4	68	50	35	15
	3	4	68	50	50	-
	4	5	80	60	65	5
	5	5	80	65	80	15
190	1	4	65	40	20	20
	2	4	68	50	35	15
	3	4	68	50	50	-
	4	5	80	60	65	5
	5	5	80	65	80	15
200	1	4	65	40	20	20
	2	4	68	50	35	15
	3	4	75	50	50	-
	4	5	88	60	65	5
	5	5	88	65	80	15
224	1	4	65	40	20	20
	2	4	68	50	35	15
	3	4	75	50	50	-
	4	5	88	60	65	5
	5	5	88	65	80	15
236	1	4	68	40	20	20
	2	4	68	50	35	15
	3	4	75	50	50	-
	4	5	88	60	65	5
	5	5	88	65	80	15
250	1	8	75	50	20	30
	2	8	75	50	35	15
	3	8	75	50	50	-
	4	9	88	60	65	5
	5	9	96	65	80	15

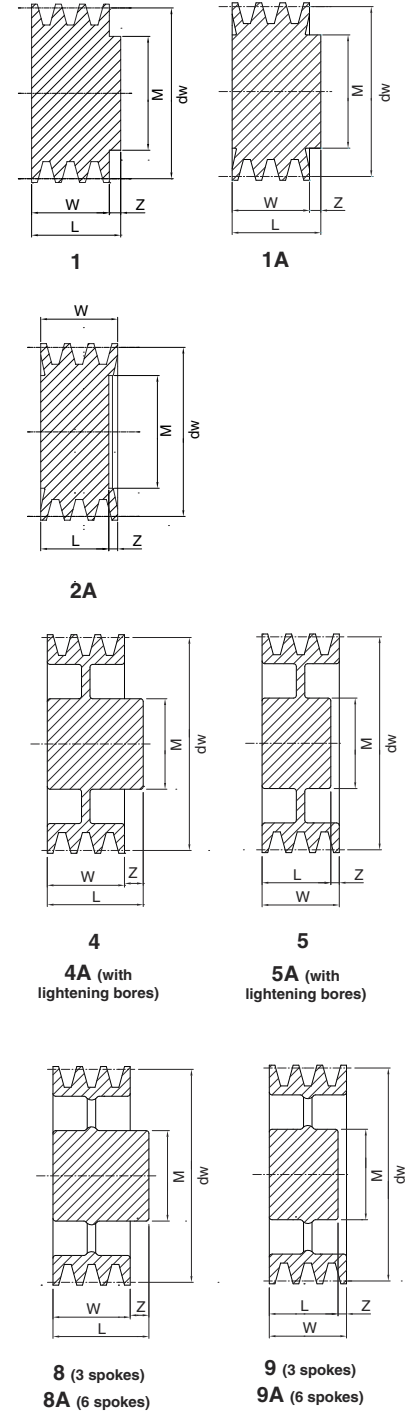


* Note: the diameter at the bottom of the groove is 28 mm
 ** Note: the diameter at the bottom of the groove is 34 mm

Dimensions of V-Pulleys PT - solid hub




» PT SPA-A

Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
280	1	8	68	50	20	30
	2	8	75	50	35	15
	3	8	75	50	50	-
	4	9	88	60	65	5
	5	9	96	65	80	15
300	1	8	75	50	20	30
	2	8	75	50	35	15
	3	8	88	60	50	10
	4	9	88	60	65	5
	5	9	96	70	80	10
315	2	8	75	50	35	15
	3	8	88	60	50	10
	4	9	88	60	65	5
	5	9	96	70	80	10
	355	2	8	88	60	35
3		8	88	60	50	10
4		9	88	60	65	5
5		9	96	70	80	10
400		1	8A	78	50	20
	2	8A	88	60	35	25
	3	8A	96	65	50	15
	4	8A	96	65	65	-
	5	9A	96	70	80	10
450	2	8A	88	60	35	25
	3	8A	96	65	50	15
	4	8A	104	70	65	5
	5	9A	104	70	80	10
	500	2	8A	88	60	35
3		8A	96	65	50	15
4		8A	104	70	65	5
5		9A	104	70	80	10
560		2	8A	88	60	35
	3	8A	96	65	50	15
	4	8A	104	70	65	5
	5	9A	104	70	80	10
	630	3	8A	104	65	50
4		8A	112	70	65	5
5		9A	120	75	80	5
800	3	8A	128	100	50	50
	4	8A	128	100	65	35
	5	8A	145	110	80	30



8 (3 spokes)
8A (6 spokes)



9 (3 spokes)
9A (6 spokes)

Dimensions of V-Pulleys PT - solid hub




PT SPB-B-5V


Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
60	1	1A	40	35*	25	10
	2	1A	40	48*	44	4
71	1	1A	45	35**	25	10
	2	1A	45	48**	44	4
	3	1A	45	67**	63	4
75	1	1A	45	35	25	10
	2	1A	45	48	44	4
	3	1A	45	67	63	4
80	1	1A	50	35	25	10
	2	1A	50	48	44	4
	3	1A	50	67	63	4
	4	1A	52	86	82	4
	5	1A	58	105	101	4
85	1	1A	50	35	25	10
	2	1A	50	48	44	4
	3	1A	52	67	63	4
	4	1A	58	86	82	4
	5	1A	58	105	101	4
90	1	1A	50	35	25	10
	2	1A	50	48	44	4
	3	1A	58	67	63	4
	4	2A	65	50	82	32
	5	2A	65	50	101	51
95	1	1A	52	35	25	10
	2	1A	55	48	44	4
	3	1A	58	67	63	4
	4	2A	65	50	82	32
	5	2A	65	50	101	51
100	1	1A	52	35	25	10
	2	1A	55	48	44	4
	3	1A	58	67	63	4
	4	2A	65	50	82	32
	5	2A	65	50	101	51
106	1	4	50	35	25	10
	2	4	55	48	44	4
	3	2A	65	50	63	13
	4	2A	65	50	82	32
	5	2A	67	50	101	51
112	1	4	55	35	25	10
	2	4	60	48	44	4
	3	2A	65	50	63	13
	4	2A	75	50	82	32
	5	2A	75	50	101	51
118	1	4	55	35	25	10
	2	4	60	48	44	4
	3	2A	75	50	63	13
	4	2A	75	50	82	32
	5	2A	75	50	101	51
125	1	4	55	35	25	10
	2	4	60	48	44	4
	3	2A	75	50	63	13
	4	5	75	50	82	32
	5	5B	75	50	101	51
	6	2A	80	60	120	60
132	1	4	60	35	25	10
	2	4	60	50	44	6
	3	5	75	50	63	13
	4	5	80	50	82	32
	5	5	80	60	101	41
	6	5	80	60	120	60

» PT SPB-B-5V


Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
140	1	4	60	35	25	10
	2	4	65	50	44	6
	3	5	75	50	63	13
	4	5	80	50	82	32
	5	5	80	60	101	41
	6	5	80	60	120	60
150	1	4	60	40	25	15
	2	4	65	50	44	6
	3	5	75	50	63	13
	4	5	80	50	82	32
	5	5	80	60	101	41
	6	5	88	60	120	60
160	1	4	65	40	25	15
	2	4	68	50	44	6
	3	5	80	50	63	13
	4	5	88	60	82	22
	5	5	88	60	101	41
	6	5	88	65	120	55
170	1	4	65	40	25	15
	2	4	68	50	44	6
	3	5	80	50	63	13
	4	5	88	60	82	22
	5	5	88	60	101	41
	6	5	104	65	120	55
180	1	4	65	40	25	15
	2	4	68	50	44	6
	3	5	80	50	63	13
	4	5	88	60	82	22
	5	5	88	70	101	31
	6	5	104	70	120	50
190	1	4	65	40	25	15
	2	4	68	50	44	6
	3	5	80	50	63	13
	4	5	88	60	82	22
	5	5	88	70	101	31
	6	5	104	80	120	40
200	1	4	68	40	25	15
	2	4	68	50	44	6
	3	5	80	50	63	13
	4	5	88	60	82	22
	5	5	88	70	101	31
	6	5	104	80	120	40
212	1	4	68	45	25	20
	2	4	68	50	44	6
	3	5	80	50	63	13
	4	5	88	60	82	22
	5	5	88	70	101	31
	6	5	104	80	120	40
224	1	4	68	45	25	20
	2	4	75	50	44	6
	3	5	80	50	63	13
	4	5	88	60	82	22
	5	5	96	70	101	31
	6	5	104	80	120	40
236	1	4	68	45	25	20
	2	4	75	50	44	6
	3	5	80	60	63	3
	4	5	88	65	82	17
	5	5	96	75	101	26
	6	5	104	80	120	40




1A




2A



4



5



5B

* Note: the diameter at the bottom of the groove is 32 mm
 ** Note: the diameter at the bottom of the groove is 43 mm


Dimensions of V-Pulleys PT - solid hub




» PT SPB-B-5V

Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
250	1	8	70	45	25	20
	2	8	75	50	44	6
	3	9	88	60	63	3
	4	9	96	65	82	17
	5	4A	104	75	101	26
	6	4A	104	80	120	40
280	1	8	75	45	25	20
	2	8	75	50	44	6
	3	9	88	60	63	3
	4	9	96	65	82	17
	5	9	104	75	101	26
	6	9	104	80	120	40
300	1	8	75	50	25	25
	2	8	80	50	44	6
	3	9	88	60	63	3
	4	9	96	65	82	17
	5	9	104	75	101	26
	6	9	104	80	120	40
315	2	8	88	60	44	16
	3	9	88	60	63	3
	4	9	96	65	82	17
	5	9	104	75	101	26
	6	9	120	90	120	30
	355	1	8A	80	50	25
2		8	88	60	44	16
3		9	96	60	63	3
4		9	96	65	82	17
5		9	104	75	101	26
6		9	120	90	120	30
400	2	8A	88	60	44	16
	3	8A	96	65	63	2
	4	9A	104	75	82	7
	5	9A	112	85	101	16
	6	9A	120	100	120	20
	450	2	8A	88	60	44
3		8A	96	65	63	2
4		9A	104	75	82	7
5		9A	112	85	101	16
6		9A	120	100	120	20
500		2	8A	96	65	44
	3	8A	104	75	63	12
	4	8A	112	85	82	3
	5	9A	120	90	101	11
	6	9A	128	105	120	15
	560	2	8A	96	65	44
3		8A	104	75	63	12
4		8A	112	85	82	3
5		9A	120	90	101	11
6		9A	128	105	120	15


Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	z [mm]
630	2	8A	104	65	44	21
	3	8A	120	75	63	12
	4	8A	128	105	82	23
	5	8A	145	115	101	14
	6	9A	145	115	120	5
	710	2	8A	96	65	44
3		8A	112	75	63	12
4		8A	120	90	82	8
5		8A	128	105	101	4
6		9A	145	115	120	5
800		2	8A	104	70	44
	3	8A	120	90	63	27
	4	8A	128	105	82	23
	5	8A	145	115	101	14
	6	9A	145	115	120	5



4
4A (with lightening bores)



8 (3 spokes)
8A (6 spokes)



9 (3 spokes)
9A (6 spokes)

Dimensions of V-Pulleys PT - solid hub




PT C


Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	d [mm]	z [mm]
140	1	6	62	58	34	16	24
	2	7	70	58	59,5	16	2
	3	3	83	70	85	16	15
	4	3	83	74	110,5	16	37
	5	3	83	78	136	16	58
	6	3	83	78	161,5	20	84
150	1	6	70	59	34	16	25
	2	6	70	61	59,5	16	2
	3	3	93	70	85	16	15
	4	3	93	74	110,5	16	37
	5	3	93	78	136	16	58
	6	3	93	78	161,5	20	84
160	1	6	62	59	34	16	25
	2	6	70	61	59,5	16	2
	3	3	103	70	85	16	15
	4	3	103	74	110,5	20	37
	5	3	103	78	136	20	58
	6	3	103	78	161,5	20	84
170	1	6	70	60	34	16	26
	2	6	70	62	59,5	16	3
	3	7	78	74	85	20	11
	4	3	113	74	110,5	20	37
	5	3	113	78	136	20	58
	6	3	113	80	161,5	20	82
180	1	6	70	60	34	16	26
	2	6	70	60	59,5	16	1
	3	7	78	72	85	20	13
	4	7	82	74	110,5	20	37
	5	7	82	80	136	20	56
	6	7	87	72	161,5	20	90
190	1	6	70	60	34	16	26
	2	6	74	60	59,5	16	1
	3	7	78	72	85	20	13
	4	7	82	74	110,5	20	37
	5	7	84	80	136	20	56
	6	7	88	85	161,5	20	77
200	1	6	71	60	34	16	26
	2	6	73	72	59,5	20	13
	3	7	83	76	85	20	9
	4	7	90	88	110,5	20	23
	5	7	92	92	136	20	44
	6	7	96	98	161,5	20	64
224	1	6	71	63	34	20	29
	2	6	76	68	59,5	20	9
	3	7	83	76	85	20	9
	4	7	93	90	110,5	20	21
	5	7	93	92	136	25	44
	6	7	98	98	161,5	25	64
250	1	6	82	63	34	20	29
	2	6	82	71	59,5	20	12
	3	7	90	80	85	20	5
	4	7	95	90	110,5	20	21
	5	7	100	96	136	25	40
	6	7	102	102	161,5	25	60

» PT C


Pitch dw [mm]	Number of grooves	Type	M [mm]	L [mm]	W [mm]	d [mm]	z [mm]
280	1	6	82	64	34	20	30
	2	6	82	74	59,5	20	15
	3	7	90	80	85	20	5
	4	7	95	90	110,5	20	21
	5	7	100	96	136	25	40
	6	11	102	102	161,5	25	60
300	1	11	85	65	34	20	31
	2	11	90	75	59,5	20	16
	3	11	90	80	85	20	5
	4	11	105	90	110,5	20	21
	5	11	105	95	136	25	41
	6	11	105	107	161,5	25	55
315	1	11	85	65	34	20	31
	2	11	90	75	59,5	20	16
	3	11	90	80	85	20	5
	4	11	105	90	110,5	25	21
	5	11	105	95	136	25	41
	6	11	105	107	161,5	25	55
355	1	11	100	70	34	25	36
	2	11	105	80	59,5	25	21
	3	11	105	80	85	25	5
	4	11	115	90	110,5	25	21
	5	11	115	95	136	25	41
	6	11	115	110	161,5	25	52
400	1	11	100	70	34	25	36
	2	11	105	75	59,5	25	16
	3	11	105	80	85	25	5
	4	11	120	90	110,5	25	21
	5	11	120	95	136	25	41
	6	11	120	110	161,5	25	52
450	1	11	105	70	34	25	36
	2	11	110	75	59,5	25	16
	3	11	110	80	85	25	5
	4	11	120	95	110,5	32	16
	5	11	120	100	136	32	36
	6	11	120	110	161,5	32	52
500	1	11	110	75	34	25	41
	2	11	115	80	59,5	25	21
	3	11	115	85	85	25	-
	4	11	125	100	110,5	32	11
	5	11	125	110	136	32	26
	6	11	125	115	161,5	32	47
560	1	11	110	75	34	25	41
	2	11	115	80	59,5	25	21
	3	11	115	85	85	25	-
	4	11	125	100	110,5	32	11
	5	11	125	110	136	32	26
	6	11	125	115	161,5	32	47
630	1	11	115	75	34	25	41
	2	11	120	80	59,5	25	21
	3	11	120	95	85	25	10
	4	11	130	100	110,5	32	11
	5	11	130	110	136	32	26
	6	11	130	115	161,5	32	47




3



6



7





11

Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®



“PBT” SPZ-Z-3V

dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
63	1	1	1108	11-28	62	22	6	-	16
	2	10	1108	11-28	-	22	6	38	28
	3	10	1108	11-28	-	22	18	38	40
67	1	1	1108	11-28	62	22	6	-	16
	2	10	1108	11-28	-	22	6	38	28
	3	10	1108	11-28	-	22	18	38	40
71	1	1	1108	11-28	62	22	6	-	16
	2	10	1108	11-28	-	22	6	42	28
	3	10	1108	11-28	-	22	18	42	40
75	1	1	1108	11-28	62	22	6	-	16
	2	10	1210	11-32	-	25	3	48	28
	3	10	1210	11-32	-	25	15	48	40
	4	10	1210	11-32	-	25	27	48	52
80	1	1	1210	11-32	75	25	9	-	16
	2	10	1210	11-32	-	25	3	52	28
	3	10	1210	11-32	-	25	15	52	40
	4	10	1210	11-32	-	25	27	52	52
85	1	1	1210	11-32	86	25	9	-	16
	2	10	1610	12-42	-	25	3	57	28
	3	10	1610	12-42	-	25	15	57	40
	4	10	1610	12-42	-	25	27	57	52
	5	10	1610	12-42	-	25	39	57	64
90	1	1	1210	11-32	86	25	9	-	16
	2	10	1610	12-42	-	25	3	62	28
	3	10	1610	12-42	-	25	15	62	40
	4	10	1610	12-42	-	25	27	62	52
	5	10	1610	12-42	-	25	39	62	64
95	1	1	1210	11-32	86	25	9	-	16
	2	10	1610	12-42	-	25	3	67	28
	3	10	1610	12-42	-	25	15	67	40
	4	10	1610	12-42	-	25	27	67	52
	5	10	1610	12-42	-	25	39	67	64
100	1	1	1210	11-32	86	25	9	-	16
	2	10	1610	12-42	-	25	3	71	28
	3	10	1610	12-42	10	25	15	71	40
	4	10	1610	12-42	-	25	27	71	52
	5	10	2012	14-50	-	32	32	71	64
106	1	1	1610	12-42	92	25	9	-	16
	2	10	1610	12-42	-	25	3	76	28
	3	10	1610	12-42	-	25	15	76	40
	4	10	1610	12-42	-	25	27	76	52
	5	10	2012	14-50	-	32	32	76	64
112	1	1	1610	12-42	92	25	9	-	16
	2	10	1610	12-42	-	25	3	84	28
	3	10	2012	14-50	-	32	8	84	40
	4	10	2012	14-50	-	32	20	84	52
	5	10	2012	14-50	-	32	32	84	64

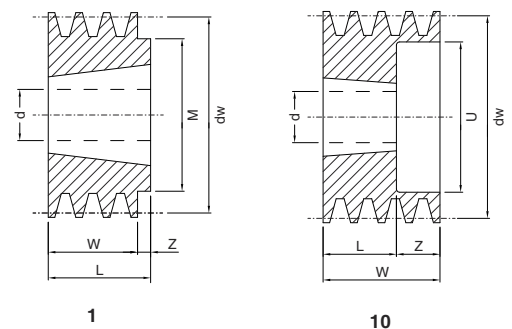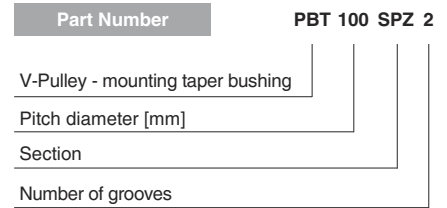


Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®



» "PBT" SPZ-Z-3V

dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
118	1	1	1610	12-42	92	25	9	-	16
	2	10	1610	12-42	-	25	3	90	28
	3	2	2012	14-50	-	32	8	90	40
	4	2	2012	14-50	-	32	20	90	52
	5	10	2012	14-50	-	32	32	90	64
125	1	1	1610	12-42	92	25	9	-	16
	2	10	1610	12-42	-	25	3	98	28
	3	2	2012	14-50	-	32	8	98	40
	4	2	2012	14-50	-	32	20	98	52
	5	2	2012	14-50	-	32	32	98	64
132	1	1	1610	12-42	92	25	9	-	16
	2	10	1610	12-42	-	25	3	103	28
	3	2	2012	14-50	-	32	8	103	40
	4	2	2012	14-50	-	32	20	103	52
	5	10	2517	18-65	-	45	19	103	64
140	1	4	1610	12-42	92	25	9	-	16
	2	10	1610	12-42	-	25	3	112	28
	3	2	2012	14-50	-	32	8	112	40
	4	2	2012	14-50	-	32	20	112	52
	5	2	2517	18-65	-	45	19	112	64
150	1	4	1610	12-42	92	25	9	-	16
	2	1	2012	14-50	112	32	4	-	28
	3	2	2012	14-50	-	32	8	122	40
	4	2	2517	18-65	-	45	7	122	52
	5	2	2517	18-65	-	45	19	122	64
160	1	4	1610	12-42	92	25	9	-	16
	2	4	2012	14-50	112	32	4	-	28
	3	2	2012	14-50	-	32	8	131	40
	4	2	2517	18-65	-	45	7	131	52
	5	2	2517	18-65	-	45	19	131	64
180	1	4	1610	12-42	92	25	9	152	16
	2	4	2012	14-50	106	32	4	152	28
	3	5	2012	14-50	106	32	8	152	40
	4	2	2517	18-65	-	45	7	152	52
	5	2	2517	18-65	-	45	19	152	64
190	2	4	2012	14-50	106	32	10	162	28
200	1	4	2012	14-50	112	32	16	171	16
	2	4	2012	14-50	112	32	4	171	28
	3	6	2012	14-50	112	32	4	171	40
	4	6	2517	18-65	125	45	3,5	171	52
	5	6	2517	18-65	-	45	9,5	171	64
224	1	12	2012	14-50	110	32	8	195	16
	2	7	2012	14-50	112	32	4	195	28
	3	6	2012	14-50	112	32	4	195	40
	4	6	2517	18-65	124	45	3,5	195	52
	5	6	2517	18-65	124	45	9,5	195	64

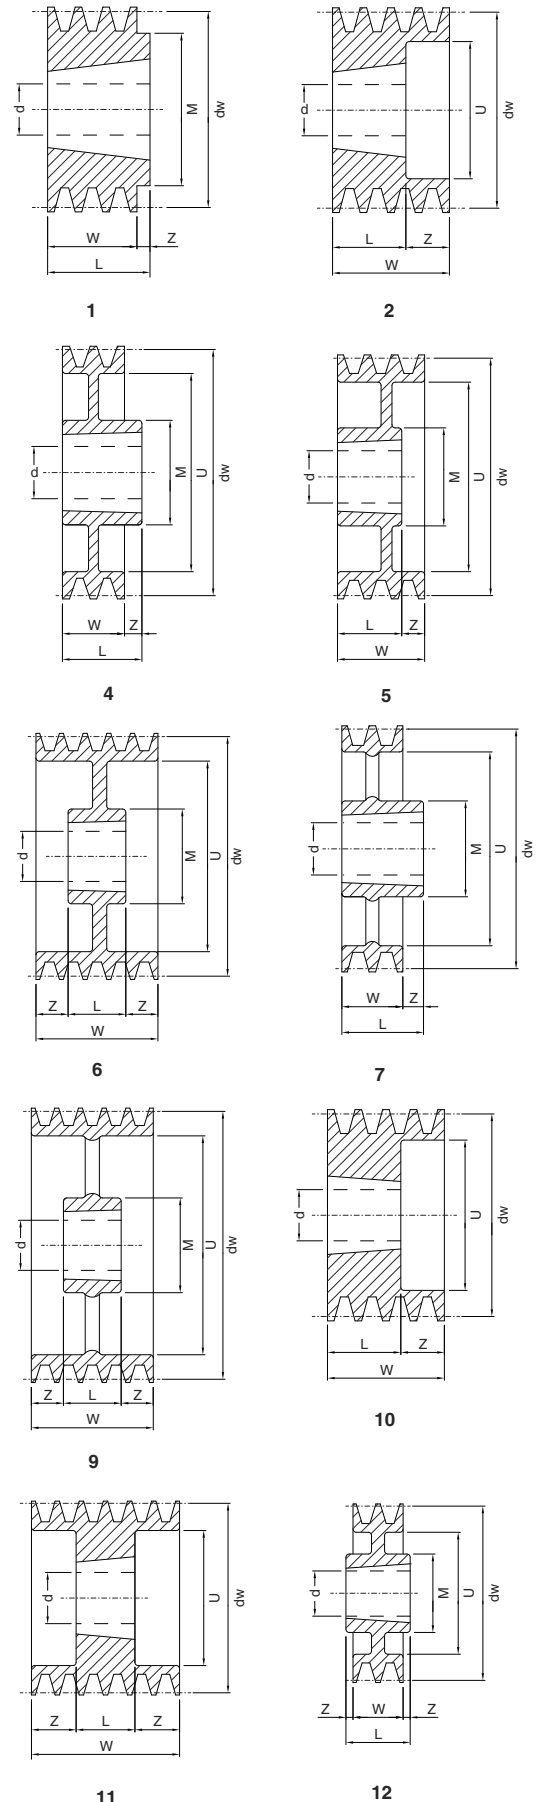


Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®




» "PBT" SPZ-Z-3V


dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
250	1	3	2012	14-50	110	32	8	223	16
	2	3	2012	14-50	110	32	2	223	28
	3	9	2012	14-50	112	32	4	223	40
	4	6	2517	18-65	124	45	3,5	223	52
	5	6	2517	18-65	124	45	9,5	223	64
280	1	3	2012	14-50	110	32	8	252	16
	2	3	2012	14-50	112	32	2	252	28
	3	3	2517	18-65	124	45	2,5	252	40
	4	9	2517	18-65	124	45	3,5	252	52
	5	9	2517	18-65	124	45	9,5	252	64
315	1	3	2012	14-50	110	32	8	288	16
	2	3	2012	14-50	110	32	2	288	28
	3	3	2517	18-65	120	45	2,5	288	40
	4	9	2517	18-65	120	45	3,5	288	52
	5	9	2517	18-65	120	45	9,5	288	64
355	1	3	2012	14-50	110	32	8	326	16
	2	3	2012	14-50	112	32	2	326	28
	3	3	2517	18-65	125	45	2,5	326	40
	4	9	2517	18-65	124	45	3,5	326	52
	5	9	2517	18-65	124	45	9,5	326	64
400	1	3	2012	14-50	110	32	8	372	16
	2	3	2517	18-65	120	45	8,5	372	28
	3	3	2517	18-65	120	45	2,5	372	40
	4	9	2517	18-65	120	45	3,5	372	52
	5	9	3020	22-75	146	51	6,5	372	64
450	1	3	2517	18-65	124	45	14,5	421	16
	2	3	2517	18-65	124	45	8,5	421	28
	3	3	2517	18-65	124	45	2,5	421	40
	4	9	3020	22-75	150	51	0,5	421	52
	5	9	3020	22-75	150	51	6,5	421	64
500	1	7	2517	18-65	120	46	30	473	16
	2	3	2517	18-65	125	45	8,5	473	28
	3	3	2517	18-65	120	45	2,5	473	40
	4	9	3020	22-75	146	51	1	473	52
	5	3	3030	25-75	146	76	6	473	64
630	1	7	2517	18-65	120	46	30	603	16
	2	7	2517	18-65	120	46	18	603	28
	3	3	2517	18-65	120	46	3	603	40
	4	9	3020	22-75	146	51	0,5	603	52
	5	9	3020	22-75	146	51	6,5	603	64




3




6



7



8




9

Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®




“PBT” SPA-A


dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
67	2	10	1108	11-28	-	22	13	37	35
71	1	1	1108	11-28	60	22	2	-	20
	2	10	1108	11-28	-	22	13	40	35
	3	10	1108	11-28	-	22	28	40	50
75	1	1	1108	11-28	60	22	2	-	20
	2	10	1108	11-28	-	22	13	44	35
	3	10	1108	11-28	-	22	28	44	50
80	1	1	1210	11-32	84	25	5	-	20
	2	10	1210	11-32	-	25	10	50	35
	3	10	1210	11-32	-	25	25	50	50
85	1	1	1210	11-32	88	25	5	-	20
	2	10	1210	11-32	-	25	10	55	35
	3	10	1210	11-32	-	25	25	55	50
90	1	1	1210	11-32	90	25	5	-	20
	2	10	1610	12-42	-	25	10	60	35
	3	10	1610	12-42	-	25	25	56	50
	4	10	1615	12-42	-	38	27	60	65
95	1	1	1210	11-32	90	25	5	-	20
	2	10	1610	12-42	-	25	10	62	35
	3	10	1610	12-42	-	25	25	62	50
	4	10	1615	12-42	-	38	27	62	65
100	1	1	1610	12-42	92	25	5	-	20
	2	10	1610	12-42	-	25	10	66	35
	3	2	1610	12-42	-	25	25	66	50
	4	2	1615	12-42	-	38	27	66	65
	5	2	1615	12-42	-	38	42	66	80
106	1	1	1610	12-42	85	25	5	-	20
	2	10	1610	12-42	-	25	10	72	35
	3	2	1610	12-42	-	25	25	72	50
	4	10	2012	14-50	-	32	33	72	65
	5	10	2012	14-50	-	32	48	72	80
112	1	1	1610	12-42	90	25	5	-	20
	2	10	1610	12-42	-	25	10	77	35
	3	10	2012	14-50	-	32	18	77	50
	4	10	2012	14-50	-	32	33	77	65
	5	10	2012	14-50	-	32	48	77	80
118	1	1	1610	12-42	96,4	25	5	-	20
	2	10	1610	12-42	-	25	10	85	35
	3	2	2012	14-50	-	32	18	85	50
	4	2	2012	14-50	-	32	33	85	65
	5	2	2012	14-50	-	32	48	85	80
125	1	1	1610	12-42	92	25	5	-	20
	2	10	1610	12-42	-	25	10	92	35
	3	2	2012	14-50	-	32	18	92	50
	4	2	2012	14-50	-	32	33	92	65
	5	11	2012	14-50	-	32	24	92	80
132	1	1	1610	12-42	92	25	5	-	20
	2	10	2012	14-50	-	32	3	97	35
	3	2	2012	14-50	-	32	18	97	50
	4	2	2517	18-65	-	45	20	97	65
	5	11	2517	18-65	-	45	17,5	102	80
140	1	1	1610	12-42	92	25	5	-	20
	2	10	2012	14-50	-	32	3	106	35
	3	10	2517	18-65	-	45	5	106	50
	4	2	2517	18-65	-	45	20	106	65
	5	11	2517	18-65	-	45	17,5	106	80




1



2



10



11


V-PULLEYS - PBT

Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®




» "PBT" SPA-A


dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
150	1	4	1610	12-42	92	25	5	-	20
	2	10	2012	14-50	-	32	3	116	35
	3	10	2517	18-65	-	45	5	116	50
	4	2	2517	18-65	-	45	20	116	65
	5	11	2517	18-65	-	45	17,5	116	80
160	1	4	1610	12-42	92	25	5	-	20
	2	10	2012	14-50	-	32	3	126	35
	3	10	2517	18-65	-	45	5	126	50
	4	2	2517	18-65	-	45	20	126	65
	5	11	2517	18-65	-	45	17,5	126	80
170	1	4	1610	12-42	92	25	5	-	20
	2	10	2012	14-50	-	32	3	135	35
	3	10	2517	18-65	-	45	5	135	50
	4	2	2517	18-65	-	45	20	135	65
	5	11	2517	18-65	-	45	17,5	135	80
180	1	4	1610	12-42	92	25	5	146	20
	2	6	2012	14-50	108	32	1,5	146	35
	3	10	2517	18-65	-	45	5	146	50
	4	2	2517	18-65	-	45	20	146	65
	5	11	3020	22-75	-	51	14,5	146	80
190	1	4	1610	12-42	92	25	5	156	20
	2	6	2012	14-50	108	32	1,5	156	35
	3	10	2517	18-65	-	45	5	156	50
	4	2	2517	18-65	-	45	20	156	65
	5	2	3020	22-75	-	51	29	156	80
200	1	4	2012	14-50	108	32	12	165	20
	2	12	2517	18-65	123	45	5	165	35
	3	6	2517	18-65	123	45	2,5	165	50
	4	2	3020	22-75	-	51	14	165	65
	5	11	3020	22-75	-	51	14,5	165	80
212	1	4	2012	14-50	110	32	12	178	20
	2	4	2517	18-65	120	45	10	178	35
	3	6	2517	18-65	123	45	2,5	189	50
	4	2	3020	22-75	-	51	14	178	65
224	1	7	2012	14-50	112	32	12	189	20
	2	4	2517	18-65	124	45	10	189	35
	3	6	2517	18-65	124	45	2,5	189	50
	4	2	3020	22-75	-	51	14	189	65
	5	2	3020	22-75	-	51	29	189	80
236	1	7	2012	14-50	105	32	12	206	20
	2	7	2517	18-65	124	45	10	203	35
	3	9	2517	18-65	124	45	2,5	203	50
	4	6	3020	22-75	146	51	7	203	65
	5	6	3020	22-75	155	51	14,5	203	80
250	1	3	2012	14-50	112	32	6	215	20
	2	3	2517	18-65	124	45	5	215	35
	3	9	2517	18-65	124	45	2,5	215	50
	4	6	3020	22-75	159	51	7	215	65
	5	6	3020	22-75	159	51	14,5	215	80
280	1	7	2012	14-50	110	32	10	246	20
	2	7	2517	18-65	120	45	10	246	35
	3	9	2517	18-65	124	45	2,5	246	50
	4	9	3020	22-75	146	51	7	246	65
	5	12	3535	25-90	175	89	4,5	246	80
300	1	7	2012	14-50	112	32	12	266	20
	2	7	2517	18-65	124	45	10	266	35
	3	7	3020	22-75	146	51	1	266	50
	4	9	3020	22-75	146	51	7	266	65
	5	4	3535	25-90	175	89	9	266	80




1




2




3




4




6




7




9



10



11




12

Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®




» “PBT” SPA-A


dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
315	1	7	2012	14-50	110	32	10	282	20
	2	7	2517	18-65	120	45	10	282	35
	3	3	3020	22-75	146	51	0,5	282	50
	4	9	3020	22-75	146	51	7	282	65
	5	12	3535	25-90	175	89	4,5	282	80
355	1	7	2012	14-50	110	32	10	322	20
	2	7	2517	18-65	120	45	10	322	35
	3	3	3020	22-75	146	51	0,5	322	50
	4	9	3020	22-75	146	51	7	322	65
	5	3	3535	22-75	175	89	4,5	322	80
400	1	7	2012	14-50	110	32	10	366	20
	2	7	2517	18-65	120	45	10	366	35
	3	7	3020	22-75	159	51	1	366	50
	4	9	3020	22-75	146	51	7	366	65
	5	3	3535	25-90	180	89	9	366	80
450	1	7	2012	14-50	110	32	12	416	20
	2	7	2517	18-65	120	45	10	416	35
	3	7	3020	22-75	159	51	1	416	50
	4	9	3020	22-75	146	51	7	416	65
	5	3	3535	22-75	175	89	4,5	416	80
500	1	7	2517	18-65	120	45	25	467	20
	2	7	2517	18-65	120	45	10	467	35
	3	7	3020	22-75	159	51	1	465	50
	4	9	3020	22-75	146	51	7	467	65
	5	3	3535	25-90	180	89	9	467	80
560	1	7	2517	18-65	124	45	25	526	20
	2	7	3020	22-75	146	51	16	526	35
	3	7	3020	22-75	146	51	1	526	50
	4	3	3535	25-90	175	89	12	526	65
	5	3	3535	25-90	178	89	9	526	80
630	1	7	2517	18-65	124	45	25	596	20
	2	3	3020	22-75	159	51	8	596	35
	3	7	3020	22-75	160	51	1	596	50
	4	3	3535	25-90	175	89	12	596	65
	5	3	3535	25-90	178	89	9	596	80
800	2	3	3535	25-90	178	89	27	765	35
	3	3	3535	25-90	178	89	19,5	765	50
	4	3	3535	25-90	178	89	12	765	65
	5	3	4040	40-100	216	102	11	765	80
	900	3	3	3535	25-90	178	89	19,5	865
4		3	3535	25-90	178	89	12	865	65
5		3	4040	40-100	216	102	11	865	80
1000	3	3	3535	25-90	178	89	19,5	965	50
	4	3	4040	40-100	216	102	18,5	965	65
	5	3	4545	55-110	242	114	17	965	80




3




4



7



9




12

Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®



“PBT” SPB-B-5V

dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
90	1	1	1210	14-50	-	25	-	-	25
	2	10	1210	14-50	-	25	19	52	44
	3	10	1210	14-50	-	25	38	50	63
100	1	1	1610	12-42	-	25	-	-	25
	2	10	1610	12-42	-	25	19	57	44
	3	10	1610	12-42	-	25	38	57	63
112	1	1	1610	12-42	-	25	-	-	25
	2	2	1610	12-42	-	25	19	69	44
	3	10	1610	12-42	-	25	38	69	63
	4	10	1610	12-42	-	25	57	72	82
118	1	1	1610	12-42	-	25	-	-	25
	2	2	1610	12-42	-	25	19	76	44
	3	10	1610	12-42	-	25	38	76	63
125	1	1	1610	12-42	-	25	-	-	25
	2	2	2012	14-50	-	32	12	86	44
	3	2	2012	14-50	-	32	31	86	63
	4	11	2012	14-50	-	32	25	86	82
132	1	1	1610	12-42	-	25	-	-	25
	2	2	2012	14-50	-	32	12	89	44
	3	2	2012	14-50	-	32	31	89	63
	4	11	2012	14-50	-	32	25	89	82
140	1	1	1610	12-42	-	25	-	-	25
	2	2	2012	14-50	-	32	12	97	44
	3	2	2012	14-50	-	32	31	97	63
	4	11	2517	18-65	-	45	18,5	102	82
	5	11	2517	18-65	-	45	28	102	101
	6	11	2517	18-65	-	45	37,5	102	120
150	1	4	1610	12-42	-	25	-	-	25
	2	2	2012	14-50	-	32	12	107	44
	3	2	2517	18-65	-	45	18	107	63
	4	11	2517	18-65	-	45	18,5	107	82
	5	11	2517	18-65	-	45	28	107	101
	6	11	2517	18-65	-	45	37,5	107	120
160	1	4	1610	12-42	-	25	-	-	25
	2	2	2012	14-50	-	32	12	120	44
	3	2	2517	18-65	-	45	18	120	63
	4	11	2517	18-65	-	45	18,5	117	82
	5	11	2517	18-65	-	45	28	117	101
	6	11	3020	22-75	-	51	34,5	123	120
	8	11	3020	22-75	-	51	53,5	123	158
170	1	4	1610	12-42	-	25	-	-	25
	2	2	2012	14-50	-	32	12	130	44
	3	2	2517	18-65	-	45	18	130	63
	4	11	2517	18-65	-	45	18,5	127	82
	5	11	3020	22-75	-	51	25	127	101
	6	11	3020	22-75	-	51	34,5	127	120
	8	11	3030*	25-75	-	51	53,5	130	158
180	1	6	1610	12-42	90	25	-	132	25
	2	1	2517	18-65	120	45	1	-	44
	3	2	2517	18-65	-	45	18	137	63
	4	11	2517	18-65	-	45	18,5	137	82
	5	11	3020	22-75	-	51	25	137	101
	6	11	3020	22-75	-	51	34,5	137	120
	8	11	3030	25-75	-	76	41	137	158
190	1	12	2012	14-50	104	32	3,5	147	25
	2	1	2517	18-65	120	45	1	-	44
	3	2	2517	18-65	-	45	18	147	63
	4	11	2517	18-65	-	45	18,5	147	82
	5	11	3020	22-75	-	51	25	147	101
	6	11	3020	22-75	-	51	34,5	147	120
	8	11	3030	25-75	-	76	41	147	158

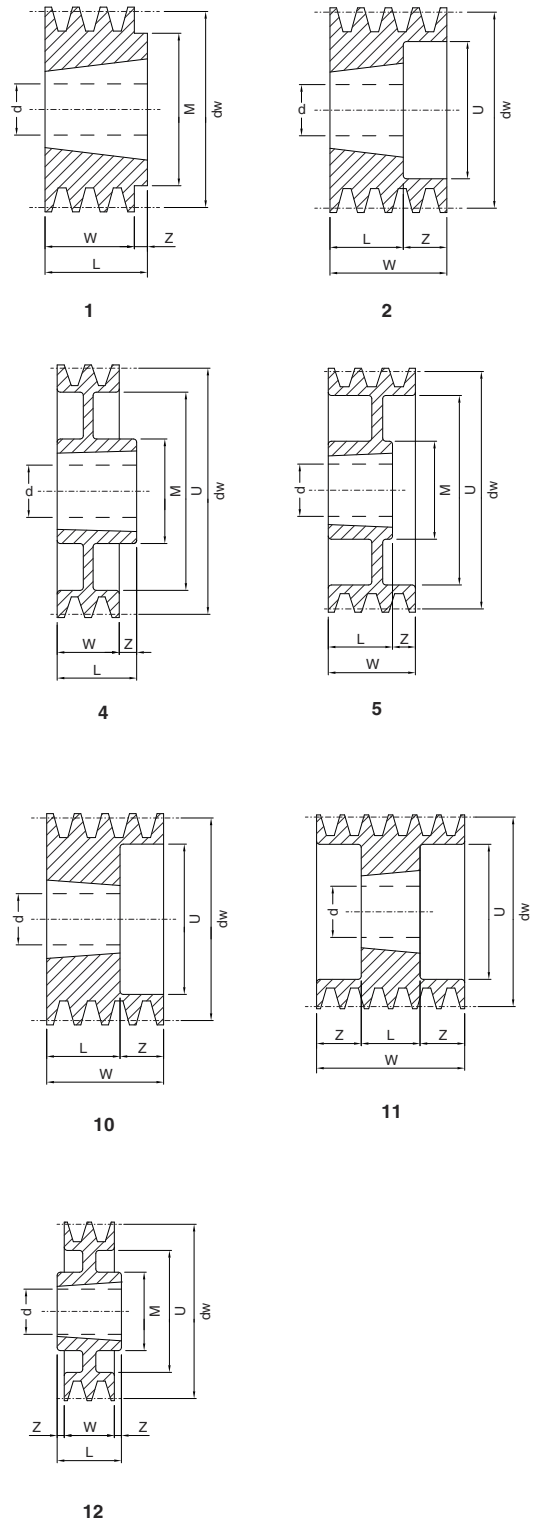


* = PBT170SPB8 - taper bush type 3020 up to sold out.

Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®



» “PBT” SPB-B-5V

dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
200	1	12	2012	14-50	104	32	3,5	157	25
	2	4	2517	18-65	117	45	1	-	44
	3	2	2517	18-65	-	45	18	157	63
	4	11	3020	22-75	-	51	15,5	157	82
	5	11	3020	22-75	-	51	25	157	101
	6	11	3020	22-75	-	51	34,5	157	120
212	1	3	2012	14-50	104	32	3,5	169	25
	2	4	2517	18-65	125	45	1	169	44
	3	5	2517	18-65	125	45	18	169	63
	4	11	3020	22-75	-	51	15,5	169	82
	5	11	3020	22-75	-	51	25	169	101
	6	11	3535	25-90	-	89	15,5	169	120
224	1	3	2012	14-50	104	32	3,5	181	25
	2	4	2517	18-65	117	45	1	181	44
	3	5	2517	18-65	117	45	18	181	63
	4	11	3020	22-75	-	51	15,5	181	82
	5	11	3020	22-75	-	51	25	181	101
	6	11	3535	25-90	-	89	15,5	181	120
236	1	3	2012	14-50	104	32	3,5	185	25
	2	4	2517	18-65	117	45	1	193	44
	3	5	2517	18-65	117	45	18	193	63
	4	11	3020	22-75	-	51	15,5	193	82
	5	11	3535	25-90	-	89	6	196	101
	6	11	3535	25-90	-	89	15,5	193	120
250	1	3	2012	14-50	104	32	3,5	207	25
	2	4	2517	18-65	124	45	1	207	44
	3	5	3020	22-75	144	51	12	207	63
	4	6	3020	22-75	144	51	15,5	207	82
	5	11	3535	25-90	-	89	6	207	101
	6	11	3535	25-90	-	89	15,5	207	120
280	1	3	2012	14-50	104	32	3,5	237	25
	2	7	2517	18-65	125	45	1	237	44
	3	9	3020	22-75	144	51	6	237	63
	4	6	3020	22-75	144	51	15,5	237	82
	5	6	3535	25-90	175	89	6	237	101
	6	6	3535	25-90	175	89	15,5	237	120
300	1	3	2012	14-50	104	32	3,5	285	25
	2	7	2517	18-65	125	45	1	257	44
	3	9	3020	22-75	144	51	6	257	63
	4	4	3535	25-90	175	89	7	257	82
	5	6	3535	25-90	175	89	6	257	101
	6	6	3535	25-90	175	89	15,5	257	120
315	1	3	2012	14-50	104	32	3,5	272	25
	2	7	2517	18-65	125	45	1	272	44
	3	9	3020	22-75	144	51	6	272	63
	4	3	3535	25-90	175	89	3,5	272	82
	5	6	3535	25-90	175	89	6	272	101
	6	6	3535	25-90	175	89	15,5	272	120
335	1	3	2012	14-50	104	32	3,5	292	25
	2	7	2517	18-65	125	45	1	292	44
	3	9	3020	22-75	144	51	6	292	63
	4	3	3535	25-90	175	89	3,5	292	82
	5	6	3535	25-90	175	89	6	292	101
	6	6	3535	25-90	175	89	15,5	292	120
353	1	3	2012	14-50	104	32	3,5	312	25
	2	7	2517	18-65	125	45	1	312	44
	3	9	3020	22-75	144	51	6	312	63
	4	3	3535	25-90	175	89	3,5	312	82
	5	6	3535	25-90	175	89	6	312	101
	6	6	3535	25-90	175	89	15,5	312	120

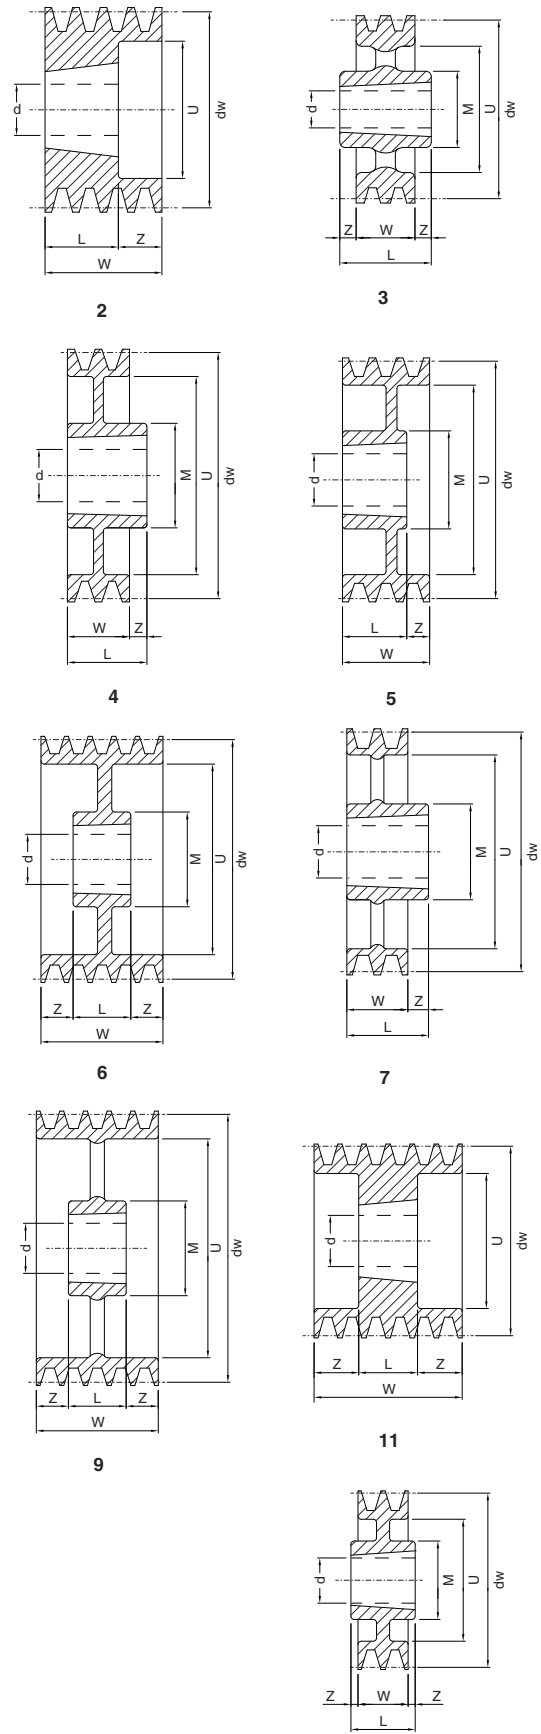


V-PULLEYS - PBT

Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®




» “PBT” SPB-B-5V


dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
355	2	3	3020	22-75	146	51	3,5	315	44
	3	9	3020	22-75	146	51	6	315	63
	4	3	3535	25-90	175	89	3,5	312	82
	5	6	3535	25-90	175	89	6	312	101
	6	6	3535	25-90	175	89	15,5	312	120
	8	6	3535	25-90	178	89	34,5	315	158
400	2	3	3020	22-75	146	51	3,5	357	44
	3	3	3535	25-90	175	89	13	357	63
	4	3	3535	25-90	175	89	3,5	357	82
	5	9	3535	25-90	175	89	6	357	101
	6	9	3535	25-90	175	89	15,5	357	120
450	2	3	4040	40-100	215	102	28	357	158
	2	3	3020	22-75	150	51	3,5	407	44
	3	7	3535	25-90	178	89	26	410	63
	4	7	3535	25-90	178	89	7	410	82
	5	8	3535	25-90	178	89	12	410	101
	6	8	4040	40-100	215	102	18	410	120
500	8	9	4040	40-100	215	102	28	410	158
	2	3	3020	22-75	146	51	3,5	460	44
	3	7	3535	25-90	178	89	26	460	63
	4	7	3535	25-90	178	89	7	460	82
	5	8	3535	25-90	178	89	12	460	101
560	6	8	4040	40-100	215	102	18	460	120
	8	9	4040	40-100	215	102	28	460	158
	2	3	3030	25-75	150	76	16	520	44
	3	7	3535	25-90	178	89	26	520	63
	4	7	3535	25-90	178	89	7	520	82
	5	7	4040	40-100	210	102	1	520	101
630	6	8	4040	40-100	215	102	18	520	120
	8	9	4545	55-110	242	114	22	520	158
	2	3	3030	25-75	150	76	16	590	44
	3	7	3535	25-90	178	89	26	590	63
	4	7	3535	25-90	178	89	7	590	82
710	5	7	4040	40-100	215	102	1	590	101
	6	8	4040	40-100	215	102	18	590	120
	8	9	4545	55-110	242	114	22	590	158
	2	3	3030	25-75	120	76	16	664	44
	3	3	3535	25-90	175	89	13	664	63
	4	3	3535	25-90	185	89	3,5	664	82
800	5	7	4040	40-100	215	102	1	664	101
	6	9	4545	55-110	240	114	3	664	120
	8	9	4545	55-110	240	114	22	664	158
	2	3	3535	25-90	175	89	22,5	754	44
	3	3	3535	25-90	175	89	13	754	63
900	4	3	4040	40-100	215	102	10	754	82
	5	7	4040	40-100	215	102	1	754	101
	6	9	4545	55-110	240	114	3	754	120
	8	9	4545	55-110	240	114	22	754	158
	3	3	3535	25-90	185	89	13	854	63
	4	3	4040	40-100	216	102	10	854	82
1000	5	7	4040	40-100	210	102	1	854	101
	6	9	4545	55-110	240	114	3	854	120
	8	9	4545	55-110	240	114	22	854	158
	2	3	4040	40-100	216	102	29	954	44
	3	3	4040	40-100	216	102	6	954	63
1250	4	3	4040	40-100	216	102	4	954	82
	5	3	4545	55-110	240	114	6,5	954	101
	6	9	4545	55-110	240	114	3	954	120
	8	9	5050	50-125	265	127	15,5	954	158
	3	3	4040	50-125	210	102	19,5	1204	63
	4	3	4545	55-110	242	114	16	1204	82
1250	5	3	4545	55-110	242	114	6,5	1204	101
	6	9	4545	55-110	242	114	3	1204	120
	8	9	5050	50-125	280	127	15,5	1204	158




3




6



7



8




9

Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®




“PBT” SPC-C


dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
212	3	11	3020	22-75	-	51	17	156	85
	4	11	3020	22-75	-	51	29,5	156	110,5
	5	11	3535	25-90	-	89	23,5	156	136
	6	11	3535	25-90	-	89	36,25	156	161,5
	8	11	3535	25-90	-	89	61,75	156	212,5
224	3	11	3020	22-75	-	51	17	173	85
	4	11	3535	49-90	-	89	11	168	110,5
	5	11	3535	25-90	-	89	23,5	173	136
	6	11	3535	25-90	-	89	36,25	173	161,5
	8	11	3535	25-90	-	89	62	168	212,5
236	3	11	3020	22-75	-	51	17	180	85
	4	11	3535	25-90	-	89	10,75	180	110,5
	5	11	3535	25-90	-	89	23,5	180	136
	6	11	3535	25-90	-	89	36,25	180	161,5
	8	11	3535	25-90	-	89	62	180	212,5
250	3	11	3020	22-75	-	51	17	194	85
	4	11	3535	25-90	-	89	10,75	198	110,5
	5	11	3535	25-90	-	89	23,5	198	136
	6	11	3535	25-90	-	89	36,25	198	161,5
	8	11	3535	25-90	-	89	61,75	198	212,5
265	3	1	3535	25-90	175	89	4	-	85
	4	11	3535	25-90	-	89	11	209	110,5
	5	11	3535	25-90	-	89	23,5	209	136
	6	11	3535	25-90	-	89	36,25	209	161,5
	8	11	3535	25-90	-	89	62	209	212,5
280	3	1	3535	49-90	175	89	4	-	85
	4	6	3535	25-90	175	89	10,75	228	110,5
	5	6	3535	25-90	-	89	23,5	224	136
	6	6	3535	25-90	175	89	36,25	228	161,5
	8	11	3535	25-90	-	89	62	224	212,5
300	3	12	3535	25-90	175	89	2	244	85
	4	6	3535	25-90	175	89	10,75	244	110,5
	5	6	3535	25-90	175	89	23,5	247	136
	6	6	3535	25-90	175	89	36,25	247	161,5
	8	11	4040	40-100	-	102	55,5	244	212,5
315	3	12	3535	25-90	175	89	2	259	85
	4	6	3535	25-90	175	89	11	259	110,5
	5	6	3535	25-90	175	89	23,5	279	136
	6	6	3535	25-90	175	89	36,25	259	161,5
	8	11	4040	40-100	-	102	55,5	259	212,5
335	3	3	3535	25-90	175	89	2	279	85
	4	9	3535	25-90	175	89	11	279	110,5
	5	6	3535	25-90	175	89	23,5	279	136
	6	6	3535	25-90	175	89	36,25	279	161,5
	8	6	4040	40-100	210	102	55,25	282	212,5
355	3	3	3535	25-90	175	89	2	299	85
	4	9	3535	25-90	175	89	11	299	110,5
	5	9	3535	25-90	175	89	23,5	299	136
	6	6	3535	25-90	175	89	36,25	299	161,5
	8	6	4040	40-100	216	102	55,5	299	212,5
400	3	3	3535	25-90	178	89	2	342	85
	4	9	3535	25-90	178	89	10,75	342	110,5
	5	9	3535	25-90	175	89	23,5	342	136
	6	6	4040	40-100	215	102	29,75	342	161,5
	8	6	4545	55-110	242	114	49,5	344	212,5
450	3	3	3535	25-90	178	89	2	393	85
	4	9	3535	25-90	178	89	10,75	393	110,5
	5	9	4040	40-100	215	102	17	393	136
	6	6	4545	55-110	242	114	24	393	161,5
	8	6	5050	50-125	267	127	43	393	212,5




1




3




6



9



11




12

Dimensions of V-Pulleys PBT - mounting taper bushing SER-SIT®




» "PBT" SPC-C


dw [mm]	Number of grooves	Type	SER-SIT® Taper bushing	d min-max [mm]	M [mm]	L [mm]	Z [mm]	U [mm]	W [mm]
475	3	3	3535	25-90	170	89	2	419	85
500	3	3	3535	25-90	178	89	2	443	85
	4	9	3535	25-90	175	89	11	443	110,5
	5	9	4040	40-100	215	102	17	443	136
	6	9	4545	55-110	242	114	24	443	161,5
560	8	6	5050	50-125	267	127	42,75	443	212,5
	3	3	3535	25-90	178	89	2	503	85
	4	9	4040	40-100	215	102	4,25	503	110,5
	5	9	4545	55-110	242	114	11	503	136
630	6	9	5050	50-125	267	127	17,25	503	161,5
	8	9	5050	50-125	267	127	42,75	503	212,5
	3	3	4040	40-100	215	102	8,5	573	85
	4	9	4545	55-110	242	114	1,5	573	110,5
710	5	9	5050	50-125	267	127	4,5	573	136
	6	9	5050	50-125	265	127	17,75	573	161,5
	8	9	5050	50-125	267	127	42,75	573	212,5
	3	3	4040	40-100	215	102	8,5	654	85
800	4	3	5050	50-125	267	127	8	654	110,5
	5	9	5050	50-125	265	127	4,5	654	136
	6	9	5050	50-125	265	127	17,25	654	161,5
	8	9	5050	50-125	265	127	43,75	654	212,5
800	3	3	4545	55-110	240	114	14,5	737	85
	4	3	5050	50-125	265	127	8,25	737	110,5
	5	9	5050	50-125	265	127	4,5	737	136
	6	9	5050	50-125	267	127	17,25	737	161,5
1000	8	9	5050	50-125	265	127	42,75	737	212,5
	3	3	5050	50-125	265	127	21	937	85
	4	3	5050	50-125	265	127	8,25	937	110,5
	5	9	5050	50-125	265	127	4,5	937	136
1250	6	9	5050	50-125	265	127	17,25	937	161,5
	8	9	5050	50-125	265	127	42,75	937	212,5
	3	3	5050	50-125	267	126	20,5	1190	85
	4	3	5050	50-125	267	126	7,75	1190	110,5
1250	5	9	5050	50-125	280	127	4,5	1190	136
	6	9	5050	50-125	280	127	17,25	1190	161,5
	8	9	5050	50-125	280	127	42,75	1190	212,5



3



6



9

Dimension of V-Pulleys PCT - oversized hub for Self Locking Units




V-Pulleys with oversized hub are designed to be installed using Self Locking Device type **SIT-LOCK® CAL 8**.
Bore tolerances is H8.

PCT SPA

dw [mm]	Number of grooves	Type	d min-max [mm]	M [mm]	U [mm]	L [mm]	W [mm]	Z [mm]
090	2	2	55	-	-	35	35	-
100	2	2	65	-	-	35	35	-
	3	2	55	-	-	50	50	-
160	3	1	55	-	127	27	50	23,0
180	2	4	65	120	147	27	35	4,0
225	2	4	55	120	192	27	35	4,0

PCT SPB

dw [mm]	Number of grooves	Type	d min-max [mm]	M [mm]	U [mm]	L [mm]	W [mm]	Z [mm]
112	2	1	55	-	70	27	44	17,0
120	2	1	65	-	78	27	44	17,0
125	4	1	55	-	83	27	82	55,0
130	3	1	80	-	88	27	63	35,0
	4	1	80	-	88	27	82	65,0
	5	1	80	-	88	27	101	74,0
140	2	1	65	-	98	27	44	17,0
	3	1	65	-	98	27	63	36,0
	4	1	65	-	98	27	82	55,0
	4	1	80	-	98	27	82	55,0
150	2	1	65	-	108	27	44	17,0
	3	1	55	-	108	27	63	36,0
	3	1	65	-	108	27	63	36,0
	3	1	80	-	108	27	82	55,0
	5	1	80	-	108	27	101	74,0
160	3	1	80	-	118	27	63	36,0
	4	1	80	-	118	27	82	55,0
	5	1	80	-	118	27	101	74,0
170	2	3	80	-	128	27	44	8,5
	3	3	80	-	128	27	93	18,0
	4	4	80	120	128	27	82	27,5
180	3	4	80	120	138	27	63	18,0
	4	4	80	120	138	27	82	27,5
	5	4	80	120	138	27	101	37,0
190	2	4	80	120	148	27	44	8,5
	4	4	80	120	148	27	82	27,5
200	3	4	80	120	158	27	63	18,0
	4	4	80	120	158	27	82	27,5
	5	4	80	120	158	27	101	37,0
212	3	4	80	120	170	27	63	18,0
	4	4	80	120	170	27	82	27,5
	5	4	80	120	170	27	82	27,5
225	2	4	80	120	183	27	44	8,5
	3	4	80	120	183	27	63	18,0
	4	4	80	120	183	27	82	27,5
	5	4	80	120	183	27	101	37,0
250	3	4	80	120	208	27	63	18,0
	4	4	80	120	208	27	82	27,5
280	4	4	80	120	238	27	82	27,5
	5	4	80	120	238	27	101	37,0
300	4	4	80	140	258	27	82	27,5
	5	4	80	140	258	27	101	37,0
315	5	5	80	140	273	27	101	37,0

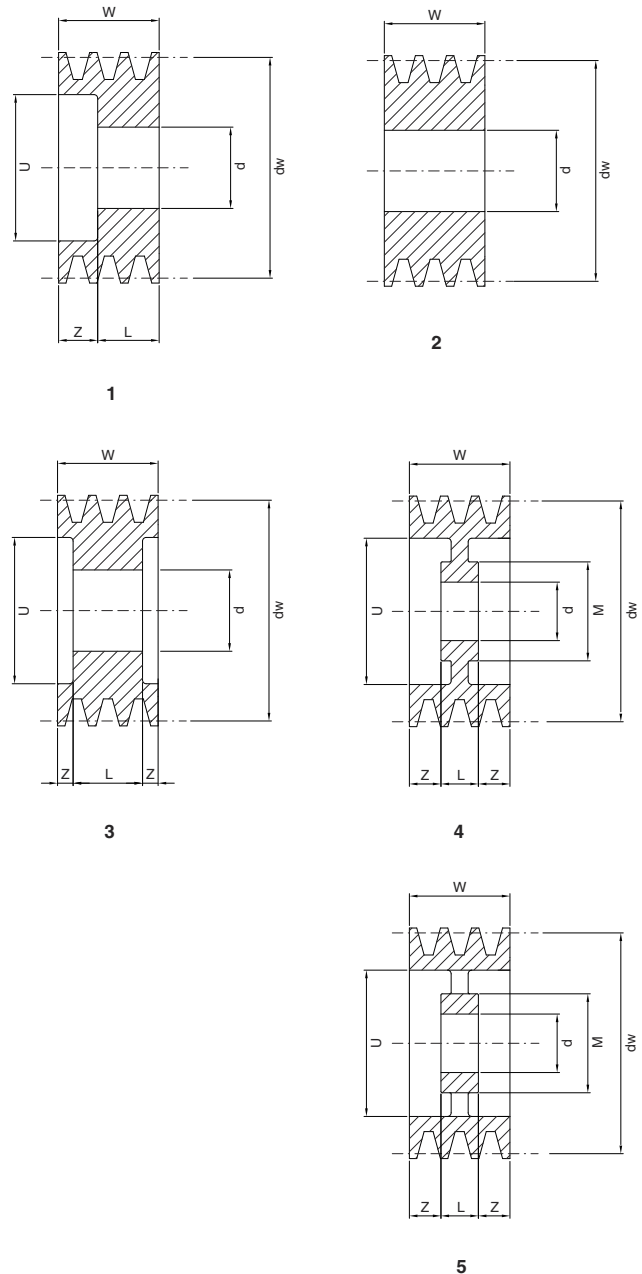

Part Number

PCT 125 SPB 4 /55

V-Pulley - mounting Self Locking Units

Pitch diameter [mm]

Section

Number of grooves

SIT-LOCK® diameter [mm]



SIT-LOCK® 8 - Self-Centering - Special Outside Diameters

Locking assembly with single taper design. The flange design prevents axial movement during installation.

SIT-LOCK® 8 has a very small axial dimension, is self centering and has been designed to suit various shaft diameters although

the overall dimensions are the same. SIT-LOCK® 8 is recommended for applications with medium torques which need a good axial positioning.

The limited number of screws make the installation fast.



SIT-LOCK® 8

Dimensions [mm]						Performances		Pressure [N/mm ²]		Clamping screws (DIN 912 - 12,9)		
d x D	H	H ₀	H ₁	H ₂	D ₁	M _T [Nm]	F _{ax} [kN]	p _w	p _n	N°	Type	M _s [Nm]
14 x 55	17	22	30	38	62	130	19	208	53	3	M8	25
16 x 55	17	22	30	38	62	149	19	182	53	3	M8	25
18 x 55	17	22	30	38	62	168	19	162	53	3	M8	25
19 x 55	17	22	30	38	62	177	19	153	53	3	M8	25
20 x 55	17	22	30	38	62	186	19	145	53	3	M8	25
22 x 55	17	22	30	38	62	288	26	186	74	3	M8	35
24 x 55	17	22	30	38	62	314	26	170	74	3	M8	35
25 x 55	17	22	30	38	62	328	26	164	74	3	M8	35
28 x 55	17	22	30	38	62	441	32	176	89	3	M8	41
30 x 55	17	22	30	38	62	473	32	164	89	3	M8	41
24 x 65	17	23	31	39	72	448	37	243	90	5	M8	30
25 x 65	17	23	31	39	72	467	37	233	90	5	M8	30
28 x 65	17	23	31	39	72	611	44	243	105	5	M8	35
30 x 65	17	23	31	39	72	655	44	227	105	5	M8	35
32 x 65	17	23	31	39	72	699	44	213	105	5	M8	35
35 x 65	17	23	31	39	72	919	53	234	126	5	M8	41
38 x 65	17	23	31	39	72	998	53	216	126	5	M8	41
40 x 65	17	23	31	39	72	1.051	53	205	126	5	M8	41
30 x 80	20	26	34	42	87	785	52	231	87	7	M8	30
32 x 80	20	26	34	42	87	837	52	217	87	7	M8	30
33 x 80	20	26	34	42	87	863	52	210	87	7	M8	30
35 x 80	20	26	34	42	87	1.070	61	232	101	7	M8	35
38 x 80	20	26	34	42	87	1.162	61	213	101	7	M8	35
40 x 80	20	26	34	42	87	1.223	61	203	101	7	M8	35
42 x 80	20	26	34	42	87	1.544	74	232	122	7	M8	41
45 x 80	20	26	34	42	87	1.655	74	217	122	7	M8	41
48 x 80	20	26	34	42	87	1.765	74	203	122	7	M8	41
50 x 80	20	26	34	42	87	1.838	74	195	122	7	M8	41

Notes:

Dimensions representing the total length of the hub are indicative; they are calculated according to the geometric rules.

For assemblies requiring larger dimensions, contact our Technical Department.

M _s	Screw tightening torque	Nm
M _T	Transmissible torque moment	Nm
F _{ax}	Transmissible axial load	N
p _w	Shaft pressure	N/mm ²
p _n	Hub pressure	N/mm ²

Adjustable Pulleys



SIT Adjustable pulleys “PR DV” and “PBR DV”

Static adjustable pulleys “PR DV” and “PBR DV” are designed to allow adjustment of pitch diameters.

One flange is screwed on the threaded hub. The movable flange is provided with set screws for fixing into the required position. It is recommended to periodically grease the hub threads.

They are suitable for Z-SPZ-3V; A-SPA; B-SPB-5V; C-SPC section V-belts.

For the power rating, please see our V-belt catalogue, taking care about the minimum allowable diameter for the selected belt section and type.

PR DV pulleys - solid hub

Material: cast iron

Finishing: protective surface treatment.

V-groove pulleys suitable for normal application for use with the following belt types:

- 1DV
- 2DV



PBR DV pulleys - for mounting taper bushing SER-SIT®

Material: cast iron

Finishing: protective surface treatment.

V-groove pulleys suitable for normal application for use with the following belt types:

- 1DV
- 2DV




Note

Due to a constant improvement of our products, technical data of the pulleys may be subject to changes. For technical and production reasons, in some cases materials other than those indicated in the catalogue may be used. For confirmation of the material actually available, please contact customer service.

Dimensions of adjustable pulleys PR DV - solid hub

PR 1DV

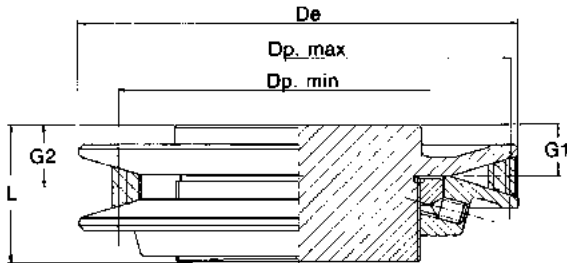

Part Number

PR 1DV 121

PR: Adjustable pulleys solid hub


Number of grooves (1 groove)

External diameter [mm]



Code	De [mm]	L [mm]	Belt SPZ					Belt SPA					Belt SPB				
			Dp max [mm]	Dp min [mm]	Variation range	G1 [mm]	G2 [mm]	Dp max [mm]	Dp min [mm]	Variation range	G1 [mm]	G2 [mm]	Dp max [mm]	Dp min [mm]	Variation range	G1 [mm]	G2 [mm]
PR1DV 59	59	36	54	38	1,42	11	13,4	53,4	40	1,34	12,5	14,5	-	-	-	-	-
PR1DV 73	73	40	68	52	1,31	14	16,4	67,4	54	1,25	15,5	17,5	66	60	1,1	16,8	17,7
PR1DV 83	83	46,5	71,5	56	1,27	16,5	18,9	77,4	58	1,33	17	20	76	64	1,19	18,3	20,2
PR1DV 95	95	46,5	83,5	68	1,23	16,5	18,9	89,4	70	1,28	17	20	88	76	1,16	18,3	20,2
PR1DV 105	105	47	90	74,5	1,21	17	19,4	99,4	77	1,29	17	20,5	98	82,5	1,19	18,3	20,7
PR1DV 121	121	48	106	90,5	1,17	17	19,4	115,4	93	1,24	17	20,5	114	98,5	1,16	18,3	20,7
PR1DV 136	136	48	121	105,5	1,15	17	19,4	130,4	108	1,21	17	20,5	129	113,5	1,14	18,3	20,7
PR1DV 152	152	48	137	121,5	1,13	17	19,4	146,4	124	1,18	17	20,5	145	129,5	1,12	18,3	20,7
PR1DV 167	167	48	152	136,5	1,11	17	19,4	161,4	139	1,16	17	20,5	160	144,5	1,11	18,3	20,7
PR1DV 232	232	59,5	206,5	184,5	1,12	25	27,1	220	197	1,12	25	28	221	202,5	1,09	25,0	28,2


PR 2DV

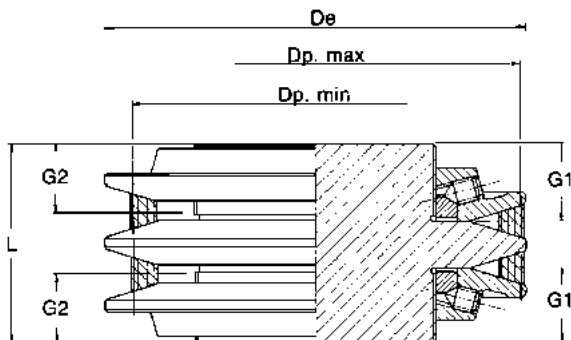

Code	De [mm]	L [mm]	Belt SPZ					Belt SPA					Belt SPB				
			Dp max [mm]	Dp min [mm]	Variation range	G1 [mm]	G2 [mm]	Dp max [mm]	Dp min [mm]	Variation range	G1 [mm]	G2 [mm]	Dp max [mm]	Dp min [mm]	Variation range	G1 [mm]	G2 [mm]
PR2DV 105	105	76	90	74,5	1,21	30	27,6	99,4	77	1,29	30	26,5	98	82,5	1,19	30	27,6
PR2DV 121	121	76	106	90,5	1,17	30	27,6	115,4	93	1,24	30	26,5	114	98,5	1,16	30	27,6
PR2DV 136	136	76	121	105,5	1,15	30	27,6	130,4	108	1,21	30	26,5	129	113,5	1,14	30	27,6
PR2DV 152	152	76	137	121,5	1,13	30	27,6	146,4	124	1,18	30	26,5	145	129,5	1,12	30	27,6
PR2DV 167	167	76	152	136,5	1,11	30	27,6	161,4	139	1,16	30	26,5	160	144,5	1,11	30	27,6
PR2DV 232	232	90	206,5	184,5	1,12	34,5	32,4	220	197	1,12	34,5	31,5	221	202,5	1,09	34,5	31,3

Dimension of pulleys PBR DV - mounting taper bushing SER-SIT®

PBR 1DV

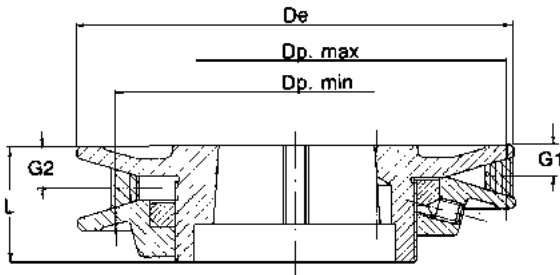

Part Number

PBR 2DV 121

PBR: Adjustable pulleys hub for taper bush


Number of grooves (2 grooves)

External diameter [mm]



Code	De [mm]	L [mm]	SER-SIT® Taper bushing	Belt SPZ					Belt SPA					Belt SPB				
				Dp max [mm]	Dp min [mm]	Variation range	G1 [mm]	G2 [mm]	Dp max [mm]	Dp min [mm]	Variation range	G1 [mm]	G2 [mm]	Dp max [mm]	Dp min [mm]	Variation range	G1 [mm]	G2 [mm]
PBR1DV 95	95	39,5	1008 (25.20)	83,5	68	1,23	9,5	11,9	89,4	70	1,28	10	13	88	76	1,16	11,3	13,2
PBR1DV 105	105	40	1108 (28.20)	90	74,5	1,21	10	12,4	99,4	77	1,29	10	13,5	98	82,5	1,19	11,3	13,7
PBR1DV 121	121	41	1108 (28.20)	106	90,5	1,17	10	12,4	115,4	93	1,24	10	13,5	114	98,5	1,16	11,3	13,7
PBR1DV 136	136	41	1210 (30.25)	121	105,5	1,15	10	12,4	130,4	108	1,21	10	13,5	129	113,5	1,14	11,3	13,7
PBR1DV 152	152	41	1610 (40.25)	137	121,5	1,13	10	12,4	146,4	124	1,18	10	13,5	145	129,5	1,12	11,3	13,7
PBR1DV 167	167	41	1610 (40.25)	152	136,5	1,11	10	12,4	161,4	139	1,16	10	13,5	160	144,5	1,11	11,3	13,7
PBR1DV 232	232	47,5	2012 (50.30)	206,5	184,5	1,12	13	15,1	220	197	1,12	13	16	221	202,5	1,09	13	16,2

PBR 2DV

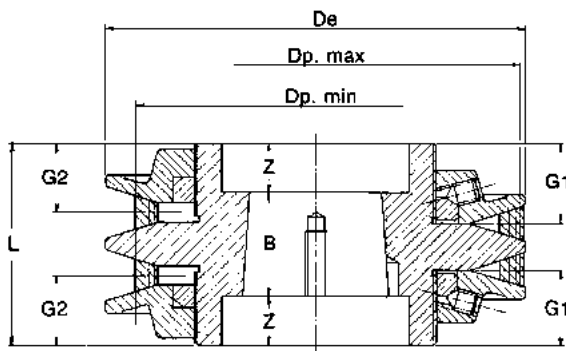

Code	De [mm]	L [mm]	Z	B [mm]	SER-SIT® Taper bushing	Belt SPZ					Belt SPA					Belt SPB				
						Dp max [mm]	Dp min [mm]	Variation range	G1 [mm]	G2 [mm]	Dp max [mm]	Dp min [mm]	Variation range	G1 [mm]	G2 [mm]	Dp max [mm]	Dp min [mm]	Variation range	G1 [mm]	G2 [mm]
PBR2DV 105	105	76	27	22	1108 (28.20)	90	74,5	1,21	30	27,6	99,4	77	1,29	30	26,5	98	82,5	1,19	30	27,6
PBR2DV 121	121	76	17	42	1215 (30.40)	106	90,5	1,17	30	27,6	115,4	93	1,24	30	26,5	114	98,5	1,16	30	27,6
PBR2DV 136	136	76	17	42	1215 (30.40)	121	105,5	1,15	30	27,6	130,4	108	1,21	30	26,5	129	113,5	1,14	30	27,6
PBR2DV 152	152	76	17	42	1615 (40.40)	137	121,5	1,13	30	27,6	146,4	124	1,18	30	26,5	145	129,5	1,12	30	27,6
PBR2DV 167	167	76	17	42	1615 (40.40)	152	136,5	1,11	30	27,6	161,4	139	1,16	30	26,5	160	144,5	1,11	30	27,6
PBR2DV 232	232	90	21,5	47	2517 (65.45)	206,5	184,5	1,12	34,5	32,4	220	197	1,12	34,5	31,5	221	202,5	1,09	34,5	31,3

Variable Speed Pulleys



SIT Variable speed pulleys "VAR"


Description - VAR Pulleys

The variable speed pulley is a well established drive; designed to give continuous speed variation at a comparative low cost. Unfortunately it is well known that this design is subject to excvise flange wear due to the type of drive systems employed.

- The hub is made from induction hardened steel, hard chrome plated and ground to give uninterrupted slide fit with flanges. Keys are not used with this application.
- Moving flanges give a wide contact area therefore eliminating

uneven belt pressure.

- The pulley flanges are coupled by means of nylon sleeve couplings to the outside of the flanges and by two flates machined on each end of the pulley hub. Two springs situated inside the nylon coupling give the desired pressure.
- There is provision for re-greasing the pulley slideways, although the grease chambers are pre-packed before leaving the factory.

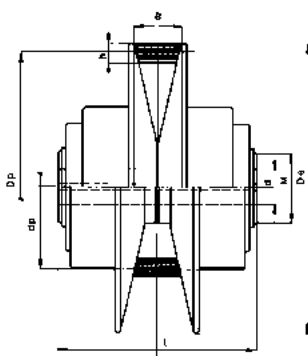


Part Number	PV	160	VAR	22
Variable pulley				
External diameter [mm]				
Type "VAR"				
Finished bore diameter [mm]				

Type	Power				Belt a x b [mm]	De [mm]	L [mm]	Dw		Hub and bores			Variation range	Weight [Kg]
	750 [rpm]	1000 [rpm]	1500 [rpm]	3000 [rpm]				Max Dp [mm]	Min dp [mm]	M (1) [mm]	d (2) [mm]	Finished bores (3) [mm]		
VAR 100	0,25	0,33	0,50	1	13 x 6	100	65	97	37	23	10	11-12-14-16	2,61	0,90
VAR 130	0,37	0,50	0,75	1,5	22 x 8	130	88	126	46	27	10	14-18-19	2,73	1,69
VAR 160	0,75	1,0	1,50	3	28 x10	160	115	155	60	34	10	18-19-22-24	2,58	3,25
VAR 190	1,75	2,30	3,50	7	36 x12	190	131	184	65	39	10	19-22-24-25-28	2,83	4,85
VAR 240	2,75	3,65	5,50	-	46 x 13	240	170	233	72	43	10	24-25-28-32	3,22	8,60
VAR 300	5,00	6,60	10,0	-	54 x 16	300	200	292	91	54	10	32-38-42	3,21	15,00

(1) Diameter steel hubs (2) Diameter pilot hole tolerance H11 (3) Diameter bore holes H7 with keyway UNI

Installation instructions

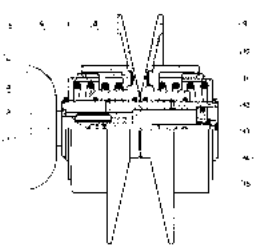	1	Motor shaft
	2	Key
	3	Aluminium seal washer
	4	Pulley shaft
	5	Stop ring
	6	Toothed bushing
	7	OR packing
	8	Spring (2 pieces)
	9	Flange (2 pieces)
	10	SM/23 resin sleeve (2 pieces)
	11	OR packing
	12	Steel washer
	13	Lubrifcation grease
	14	Aluminium seal washer
	15	Screw

Number operations	1	2	3	4	5	6
	1	Take off the key (2) from the motor shaft (1)				
	2	Assemble the aluminium seal washer (1) on the motor shaft (3)				
	3	Reassemble the key (2) on the motor shaft (1)				
	4	Assemble the pulley				
	5	Lock the pulley on the motor shaft (1) by means of the screw (15) not forgetting to insert the aluminium seal washer (14)				
	6	IMPORTANT Fill up the grease chamber with the lubrication grease (13). Thick grease in preferred.				


SIT Variable speed pulleys "FIXED"

Description - FIXED Pulleys

Fixed driven pulley have been specifically designed to be used with VAR pulleys. They are manufactured in grey cast iron (GG20 - GG25) and are treated with a black manganese phosphating process.

Part Number	PF 160/46
Fixed pulley	
External diameter [mm] / Groove width [mm]	

Type	FIXED 100	FIXED 130	FIXED 160	FIXED 190	FIXED 240	FIXED 300
α	25°	25°	25°	28°	28°	28°
h [mm]	12	16	18	20	26	32
l [mm]	13	22	28	36	46	54
L [mm]	20	26	32	43	52	70
Diameter p [mm]	Hub diameter m [mm]					
80	30	30	35	-	-	-
90	35	38	38	-	-	-
100	35	38	38	-	-	-
112	40	42	42	50	-	-
125	40	46	46	54	-	-
140	40	48	48	54	55	-
160	45	48	48	60	68	-
170	45	55	55	62	70	-
180	50	58	58	68	75	80
200	50	68	68	70	78	82
224	60	70	70	70	85	90
250	60	70	75	75	88	92
280	60	70	78	78	90	92
315	60	80	80	80	90	100
355	-	85	90	90	90	95
400	-	-	90	90	90	95
450	-	-	-	90	95	95
500	-	-	-	-	95	105

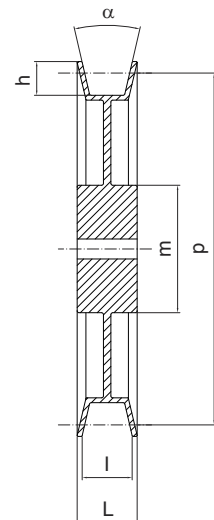

Speed range and center distance for VAR and fixed pulleys assemblies

VAR 100

Pitch length [mm]	Speed range - center distances																													
	Speed range in rpm of driven pulley with drive VAR pulley (rpm)								Belts inside length in mm																					
	750		1000		1500		3000		500	525	550	600	650	675	700	750	800	850	900	950	1000	1060	1120	1180	1250	1320	1400	1500	1600	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Center distances in mm calculated with belts 13X6																					
80	876	355	1168	447	1752	671	3505	1343	122	135	147	172	197	210	222	247	272	297	322	347	372	402	432	462	497	532	572	-	-	
90	782	299	1042	399	1564	599	3128	1199	115	127	140	165	190	202	215	240	265	290	315	340	365	395	425	455	490	525	565	-	-	
100	706	270	941	360	1412	541	2825	1082	-	119	132	157	182	194	207	232	257	282	307	332	357	387	417	447	482	517	557	-	-	
112	632	242	843	323	1265	485	2530	970	-	-	122	147	172	185	197	222	247	272	297	322	347	377	407	437	472	507	547	-	-	
125	568	217	758	290	1137	435	2274	871	-	-	-	136	161	174	186	212	237	262	287	312	337	367	397	427	462	497	537	-	-	
140	508	195	678	260	1017	390	2035	780	-	-	-	-	149	161	174	199	224	249	274	299	324	355	385	415	450	485	525	-	-	
160	446	171	595	228	893	342	1786	684	-	-	-	-	-	143	156	182	207	232	257	283	308	338	368	398	433	468	509	-	-	
170	420	161	561	215	841	322	1683	645	-	-	-	-	-	-	147	173	198	224	249	274	299	330	360	390	425	460	500	-	-	
180	397	152	530	203	795	304	1591	609	-	-	-	-	-	-	-	163	189	215	240	265	291	321	351	381	417	452	492	-	-	
200	358	137	478	183	717	274	1434	549	-	-	-	-	-	-	-	-	170	196	222	248	273	304	334	364	400	435	475	-	-	
224	320	122	427	163	641	245	1282	491	-	-	-	-	-	-	-	-	-	-	199	225	251	282	313	343	379	414	455	-	-	
250	287	110	383	147	575	220	1151	441	-	-	-	-	-	-	-	-	-	-	-	199	225	257	288	319	355	391	432	-	-	
280	257	98	343	131	514	197	1029	394	-	-	-	-	-	-	-	-	-	-	-	-	164	193	226	259	290	327	363	405	-	-
315	228	87	305	117	457	175	915	351	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	220	254	292	329	371	-	-

VAR 130

Pitch length [mm]	Speed range - center distances																													
	Speed range in rpm of driven pulley with drive VAR pulley (rpm)								Belts inside length in mm																					
	750		1000		1500		3000		500	525	550	600	650	675	700	750	800	850	900	950	1000	1060	1120	1180	1250	1320	1400	1500	1600	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Center distances in mm calculated with belts 22x8																					
80	1124	410	1498	547	2248	821	4496	1642	-	-	-	152	177	190	202	227	252	277	303	328	353	383	413	443	478	513	553	603	653	
90	1004	367	1339	489	2009	734	4019	1468	-	-	-	145	170	182	195	220	245	270	295	320	345	375	405	435	470	505	545	595	645	
100	908	331	1211	442	1816	663	3633	1327	-	-	-	137	162	175	187	212	237	262	287	312	337	367	397	427	462	497	537	587	637	
112	814	297	1086	396	1629	595	3258	1190	-	-	-	128	153	166	178	203	228	253	278	303	328	358	388	418	453	488	528	578	628	
125	732	267	976	356	1465	535	2930	1070	-	-	-	-	143	155	168	193	218	243	268	293	318	348	378	408	443	478	518	568	618	
140	656	239	875	319	1312	479	2625	959	-	-	-	-	-	-	156	181	206	231	256	281	306	336	366	396	431	466	506	556	606	
160	576	210	768	280	1152	421	2305	842	-	-	-	-	-	-	-	164	190	215	240	265	290	320	350	380	415	450	490	540	590	
170	543	198	724	264	1086	396	2173	793	-	-	-	-	-	-	-	-	181	206	231	256	282	312	342	372	407	442	482	532	582	
180	513	187	685	250	1027	375	2055	750	-	-	-	-	-	-	-	-	172	198	223	248	273	303	333	364	399	434	474	524	574	
200	463	169	617	225	926	338	1853	677	-	-	-	-	-	-	-	-	-	180	205	231	256	286	317	347	382	417	457	508	558	
224	414	151	552	202	829	303	1658	606	-	-	-	-	-	-	-	-	-	-	-	209	235	265	296	326	362	397	437	488	538	
250	372	136	496	181	744	272	1498	544	-	-	-	-	-	-	-	-	-	-	-	-	-	210	241	272	303	339	374	415	465	516
280	333	121	444	162	666	243	1332	486	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	243	275	311	347	388	439	490
315	296	108	395	144	592	216	1185	433	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	239	277	314	356	407	459
355	263	96	351	128	526	192	1053	385	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	272	316	369	421	

VARIABLE PULLEYS - PV

VAR 160

Pitch length [mm]	Speed range - center distances																												
	Speed range in rpm of driven pulley with drive VAR pulley (rpm)								Belts inside length in mm																				
	750		1000		1500		3000		500	525	550	600	650	675	700	750	800	850	900	950	1000	1060	1120	1180	1250	1320	1400	1500	1600
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Center distances in mm calculated with belts 28x10																				
80	1384	535	1846	714	2769	1071	5538	2143	131	156	182	207	233	258	283	308	334	364	394	424	459	494	534	584	634	685	735	835	-
90	1237	478	1649	638	2474	957	4948	1915	-	149	175	200	226	251	276	301	326	356	386	416	452	487	527	577	627	677	727	827	-
100	1118	432	1490	577	2236	865	4472	1731	-	142	168	193	218	243	269	294	319	349	379	409	444	479	519	569	619	669	719	819	-
112	1002	387	1336	517	2004	775	4009	1551	-	-	159	184	209	234	260	285	310	340	370	400	435	470	510	560	610	660	710	810	-
125	901	348	1201	465	1802	697	3605	1395	-	-	-	175	200	225	250	215	300	330	360	390	425	460	500	550	600	650	700	800	-
140	807	312	1076	416	1614	624	3229	1249	-	-	-	-	188	213	238	263	288	318	348	378	413	448	488	538	588	638	688	788	-
160	708	274	945	365	1417	548	2835	1097	-	-	-	-	-	198	223	248	273	303	333	363	398	433	473	523	573	623	673	773	-
170	668	258	890	344	1336	517	2672	1034	-	-	-	-	-	190	215	240	265	295	325	355	390	425	465	515	565	615	665	765	-
180	631	244	842	326	1263	489	2526	978	-	-	-	-	-	181	206	231	256	287	317	347	382	417	457	507	557	607	657	757	-
200	569	220	759	294	1139	441	2279	882	-	-	-	-	-	-	-	215	240	270	300	330	365	400	441	491	541	591	641	741	-
224	509	197	679	263	1019	394	2039	789	-	-	-	-	-	-	-	-	219	250	270	310	345	381	421	471	521	571	621	721	-
250	457	177	610	236	915	354	1830	708	-	-	-	-	-	-	-	-	-	227	257	288	323	359	399	449	499	550	600	700	-
280	409	158	545	211	818	316	1636	633	-	-	-	-	-	-	-	-	-	-	229	250	296	332	373	423	474	524	575	675	-
315	364	141	485	188	728	282	1457	564	-	-	-	-	-	-	-	-	-	-	-	-	263	300	341	392	443	494	545	646	-
355	323	125	431	167	647	250	1294	501	-	-	-	-	-	-	-	-	-	-	-	-	-	-	302	355	407	458	509	611	-
400	287	111	383	148	575	222	1150	445	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	309	363	415	468	571	-

VAR 190

Pitch length [mm]	Speed range - center distances																														
	Speed range in rpm of driven pulley with drive VAR pulley (rpm)								Belts inside length in mm																						
	750		1000		1500		3000		500	525	550	600	650	675	700	750	800	850	900	950	1000	1060	1120	1180	1250	1320	1400	1500	1600		
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Center distances in mm calculated with belts 36x12																						
112	1189	419	1586	559	2379	838	4759	1677	-	-	-	-	189	214	240	265	290	320	350	380	416	451	491	541	591	641	691	791	911		
125	1069	377	1426	502	2139	754	4279	1508	-	-	-	-	180	205	230	255	280	311	341	371	406	441	481	531	581	631	681	781	901		
140	958	337	1277	450	1916	675	3833	1350	-	-	-	-	194	219	244	269	299	329	359	394	429	470	520	570	620	670	770	890			
160	841	296	1121	395	1682	593	3365	1186	-	-	-	-	-	204	229	254	284	314	344	379	414	454	504	554	604	654	754	874			
170	793	279	1057	372	1586	558	3172	1117	-	-	-	-	-	196	221	246	276	306	336	371	406	446	496	546	596	646	746	866			
180	750	264	1000	352	1500	528	3000	1057	-	-	-	-	-	-	214	239	269	299	329	364	399	439	489	539	589	639	739	859			
200	676	238	901	317	1352	476	2705	953	-	-	-	-	-	-	-	223	253	283	313	348	383	423	473	523	573	623	723	843			
224	605	213	806	284	1210	426	2420	853	-	-	-	-	-	-	-	-	233	263	293	328	363	403	453	504	554	604	704	824			
250	543	191	724	255	1086	382	2173	765	-	-	-	-	-	-	-	-	-	241	271	307	342	382	432	482	532	583	683	803			
280	485	171	647	228	971	342	1943	684	-	-	-	-	-	-	-	-	-	-	245	281	316	357	407	457	508	558	658	778			
315	432	152	576	203	865	304	1730	609	-	-	-	-	-	-	-	-	-	-	-	-	-	-	326	376	427	478	528	629	749		
355	384	135	512	180	768	270	1537	541	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	288	340	391	442	493	595	716	
400	341	120	455	160	683	240	1366	481	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	348	401	452	555	677	
450	303	107	405	142	607	214	1215	428	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	351	404	509	632	

VAR 240

Pitch length [mm]	Speed range - center distances																			
	Speed range in rpm of driven pulley with drive VAR pulley (rpm)						Belts inside length in mm													
	750		1000		1500		995	1055	1115	1175	1245	1315	1395	1495	1595	1695	1795	2000	2240	
	Min.	Max.	Min.	Max.	Min.	Max.	Center distances in mm calculated with belts 46x13													
140	1195	371	1594	494	2391	742	225	256	286	316	352	387	427	477	528	578	628	731	851	
160	1052	326	1402	435	2104	653	-	241	272	302	337	372	412	462	513	563	613	715	835	
170	992	308	1323	410	1984	616	-	234	264	294	330	365	405	455	505	555	605	708	828	
180	939	291	1252	388	1878	583	-	227	257	287	322	357	397	447	497	547	597	700	820	
200	848	263	1130	351	1696	526	-	-	242	272	307	342	382	432	482	532	582	685	805	
224	759	235	1013	314	1519	471	-	-	-	253	288	323	363	413	463	513	563	666	786	
250	682	211	910	282	1365	423	-	-	-	-	268	303	343	393	443	493	543	645	765	
280	611	189	814	252	1222	379	-	-	-	-	-	278	318	368	419	469	519	621	741	
315	544	169	726	225	1089	338	-	-	-	-	-	-	289	339	389	440	490	593	713	
355	484	150	645	200	968	300	-	-	-	-	-	-	-	-	355	405	456	559	680	
400	430	133	574	178	861	267	-	-	-	-	-	-	-	-	-	365	416	520	642	
450	383	119	511	158	766	238	-	-	-	-	-	-	-	-	-	-	369	475	598	
500	345	107	460	143	691	214	-	-	-	-	-	-	-	-	-	-	-	427	552	

VAR 300

Pitch length [mm]	Speed range - center distances																			
	Speed range in rpm of driven pulley with drive VAR pulley (rpm)						Belts inside length in mm													
	750		1000		1500		995	1055	1115	1175	1245	1315	1395	1495	1595	1795	2000	2240		
	Min.	Max.	Min.	Max.	Min.	Max.	Center distances in mm calculated with belts 54x16													
180	1164	362	1553	483	2339	724	-	-	-	-	280	316	356	407	457	558	658	778		
200	1052	327	1403	436	2105	655	-	-	-	-	266	301	342	892	442	543	643	763		
224	943	293	1258	391	1887	587	-	-	-	-	-	284	324	374	424	525	625	745		
250	848	264	1131	352	1697	528	-	-	-	-	-	-	304	355	405	505	605	725		
280	760	236	1013	315	1520	473	-	-	-	-	-	-	-	331	381	481	581	701		
315	678	210	904	281	1356	421	-	-	-	-	-	-	-	-	354	454	554	674		
355	603	187	804	250	1206	375	-	-	-	-	-	-	-	-	-	421	521	642		
400	536	167	715	222	1073	334	-	-	-	-	-	-	-	-	-	383	484	604		
450	478	148	637	198	956	297	-	-	-	-	-	-	-	-	-	-	440	562		
500	431	134	574	178	862	268	-	-	-	-	-	-	-	-	-	-	394	517		

